



Europäisches Patentamt  
European Patent Office  
Office européen des brevets



Publication number: **0 363 029 B1**

12

## EUROPEAN PATENT SPECIFICATION

- 45 Date of publication of patent specification: 03.08.94 51 Int. Cl.<sup>5</sup>: C08F 4/602, C08F 10/00
- 21 Application number: 89309305.4
- 22 Date of filing: 13.09.89

The file contains technical information submitted after the application was filed and not included in this specification

- 54 Olefin polymerization catalyst component, olefin polymerization catalyst and process for the polymerization of olefins.

- 30 Priority: 14.09.88 JP 231201/88  
14.09.88 JP 231202/88  
14.09.88 JP 231203/88  
14.09.88 JP 231204/88  
14.09.88 JP 231208/88  
14.09.88 JP 231209/88  
14.09.88 JP 231210/88  
14.09.88 JP 231211/88  
14.09.88 JP 231212/88  
28.03.89 JP 75605/89  
28.03.89 JP 75606/89  
28.03.89 JP 75607/89  
28.03.89 JP 75611/89  
28.03.89 JP 75612/89  
28.03.89 JP 75613/89  
28.03.89 JP 75614/89  
28.03.89 JP 75615/89  
02.08.89 JP 200918/89

- 43 Date of publication of application:  
11.04.90 Bulletin 90/15

- 45 Publication of the grant of the patent:  
03.08.94 Bulletin 94/31

- 84 Designated Contracting States:  
AT BE CH DE ES FR GB GR IT LI LU NL SE

- 73 Proprietor: MITSUI PETROCHEMICAL INDUSTRIES, LTD.  
2-5, Kasumigaseki 3-chome  
Chiyoda-ku  
Tokyo 100(JP)

- 72 Inventor: Kioka, Mamoru, Mitsui Petrochemical Ind., Ltd.  
1-2 Waki 6-chome, Waki-cho  
Kuga-gun Yamaguchi 740(JP)  
Inventor: Tsutsui, Toshiyuki, Mitsui Petrochemical Ind., Ltd.  
1-2 Waki 6-chome, Waki-cho  
Kuga-gun Yamaguchi 740(JP)  
Inventor: Toyota, Akinori, Mitsui Petrochemical Ind., Ltd.  
1-2 Waki 6-chome, Waki-cho  
Kuga-gun Yamaguchi 740(JP)

- 74 Representative: Myerscough, Philip Boyd et al  
J.A.KEMP & CO.  
14, South Square  
Gray's Inn  
London WC1R 5LX (GB)

Note: Within nine months from the publication of the mention of the grant of the European patent, any person may give notice to the European Patent Office of opposition to the European patent granted. Notice of opposition shall be filed in a written reasoned statement. It shall not be deemed to have been filed until the opposition fee has been paid (Art. 99(1) European patent convention).

EP 0 363 029 B1

⑤ References cited:  
EP-A- 0 328 348

**TRANSITION METALS AND ORGANOMETAL-  
LICS AS CATALYSTS FOR OLEFIN POLYMER-  
IZATION, PROCEEDINGS OF AN INTERNA-  
TIONAL SYMPOSIUM, Hamburg, 21-24 Sep-  
tember 1987, Springer, Berlin (DE); H. SINN et  
al., pp. 257-258**

**Description****FIELD OF THE INVENTION**

5 This invention relates to olefin polymerization catalyst components, olefin polymerization catalyst and process for the polymerization of olefins, and more particularly to novel olefin polymerization catalyst components and olefin polymerization catalysts having excellent polymerization activities and capable of giving olefin (co)polymers having a narrow molecular weight distribution and a narrow composition distribution.

10

**BACKGROUND OF THE INVENTION**

It has heretofore been known that titanium based catalysts composed of a titanium compound and an organoaluminum compound, or vanadium based catalysts composed of a vanadium compound and an organoaluminum compound are used as catalyst for the preparation of  $\alpha$ -olefin polymers, for example, ethylene polymers or ethylene/ $\alpha$ -olefin copolymers.

Generally, ethylene/ $\alpha$ -olefin copolymers obtained with the titanium based catalysts have a broad molecular weight distribution and a broad composition distribution and are poor in transparency, surface non-tackiness and dynamical properties. Ethylene/ $\alpha$ -olefin copolymers obtained with the vanadium based catalyst have a narrow molecular weight distribution and a narrow composition distribution in comparison with the ethylene/ $\alpha$ -olefin copolymers obtained with the titanium based catalysts, and show a fairly good improvement in transparency, surface non-tackiness and dynamical properties, but said catalyst are low in polymerization activities and the resulting ethylene/ $\alpha$ -olefin copolymers require deashing operation. Thereafter, it is desired that catalyst systems further improved in these properties and developed to make their appearance.


Under such circumstances, on the one hand, there have been proposed recently processes for the preparation of ethylene/ $\alpha$ -olefin copolymers using catalysts composed of zirconium compounds and aluminoxanes as a new type of Ziegler catalysts for olefin polymerization.

For example, Japanese Patent L-O-P Publ. No. 19309/1983 discloses a process for the preparation of ethylene/ $\alpha$ -olefin copolymers, which process comprises polymerizing ethylene and one or at least two  $C_3$ - $C_{12}$   $\alpha$ -olefins at a temperature of from  $-50^\circ C$  to  $200^\circ C$  in the presence of a catalyst composed of a transition metal containing compound represented by the following formula



35


wherein R is cyclopentadienyl,  $C_1$ - $C_6$  alkyl or halogen, Me is a transition metal and Hal is halogen, and a linear aluminoxane represented by the following formula



40

wherein R is methyl or ethyl, and n is a number of from 4 to 20, or a cyclic aluminoxane represented by the following formula


45




wherein R and n are as defined above. This patent L-O-P publication teaches that in order to regulate the density of the resulting polyethylene, the polymerization of ethylene should be carried out in the presence of small quantities of up to 10% by weight of fairly long chain  $\alpha$ -olefins or mixtures thereof.

Japanese Patent L-O-P Publ. No. 95292/1984 discloses an invention relating to processes for preparing a linear aluminoxanes represented by the following formula

55

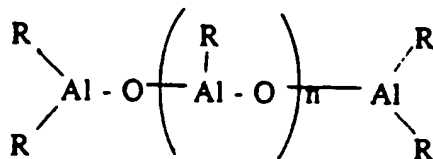


wherein n is a number of from 2 to 40, and R is C<sub>1</sub>-C<sub>6</sub> alkyl, and a cyclic aluminoxane represented by the following formula



wherein n and R are as defined above.

This patent L-O-P publication describes that when the polymerization of ethylene is carried out in the presence of a mixture comprising the aluminoxane prepared by the process of said publication, for example, methyl aluminoxane, and a bis(cyclopentadienyl)zirconium compound or a bis(cyclopentadienyl)titanium compound, there are obtained at least twenty-five million grams of polyethylene per 1 g of the transition metal and per 1 hour.

Japanese Patent L-O-P Publ. No. 35005/1985 discloses a process for preparing olefin polymerization catalyst, which comprises first reacting an aluminoxane compound represented by the following formula

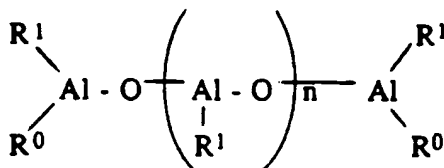


wherein R<sup>1</sup> is C<sub>1</sub>-C<sub>10</sub> alkyl, and R<sup>0</sup> is R<sup>1</sup> or R<sup>0</sup> represents -O- by linkage, with a magnesium compound, and then chlorinating the reaction product, followed by treatment with a compound of Ti, V, Zr or Cr. This patent L-O-P publication describes that the catalysts prepared by the process are particularly suitable for use in copolymerization of ethylene and C<sub>3</sub>-C<sub>12</sub> α-olefins.

Japanese Patent L-O-P Publ. No. 35006/1985 discloses a combination of (a) two or more dissimilar mono-, di- or tricyclopentadienyls or their derivatives of transition metals and (b) an aluminoxane as a catalyst for preparation of reactor blended polymers. Example 1 of this Patent L-O-P publication discloses that ethylene and propylene are polymerized in the presence of a catalyst composed of bis-(pentamethylcyclopentadienyl)dimethyl zirconium and an aluminoxane to obtain polyethylene having a number average molecular weight of 15,300, a weight average molecular weight of 36,400 and containing 3.4% of the propylene component. In Example 2 of this patent L-O-P publication, ethylene and propylene are polymerized in the presence of a catalyst composed of bis(pentamethylcyclopentadienyl)zirconium dichloride, bis(methylcyclopentadienyl)zirconium dichloride and an aluminoxane to obtain a blend of polyethylene and an ethylene/propylene copolymer consisting of a toluene-soluble portion having a number average molecular weight of 2,200 and a weight average molecular weight of 11,900 and containing 30 mol% of the propylene component and a toluene-insoluble portion having a number average molecular weight of 3,000 and a weight average molecular weight of 7,400 and containing 4.8 mol% of the propylene component, said blend having a number average molecular weight of 2,000 and a weight average molecular weight of 8,300 and containing 7.1 mol% of the propylene component. Similarly, Example 3 discloses a blend of LLDPE and an ethylene/propylene copolymer consisting of a soluble portion having a molecular weight distribution ( $\overline{M}_w / \overline{M}_n$ ) of 4.57 and containing 20.6 mol% of the propylene component and an insoluble portion having a molecular weight distribution of 3.04 and containing 2.9 mol% of the propylene component.

Japanese Patent L-O-P Publ. No. 35007/1985 discloses a process wherein ethylene alone is polymerized, or ethylene and an  $\alpha$ -olefin of 3 or more carbon atoms are copolymerized in the presence of a catalyst system containing a metallocene and a cyclic aluminoxane represented by the following formula

5



10

wherein R is an alkyl group of 1 to 5 carbon atoms, and n is an integer of 1 to about 20, or a linear aluminoxane represented by the following formula



15

wherein R and n are as defined above.

According to this patent L-O-P publication, the polymers obtained in this manner have a weight average molecular weight of about 500 to about 1,400,000 and a molecular weight distribution of 1.5 to 4.0.

20 Japanese Patent L-O-P Publ. No. 35008/1985 discloses that polyethylene or ethylene/ $\text{C}_3$ - $\text{C}_{10}$   $\alpha$ -olefins copolymers having a wide molecular weight distribution are prepared by using a catalyst system comprising at least two metallocenes and aluminoxane. This patent L-O-P publication indicates that the copolymers obtained in this manner have a molecular weight distribution ( $\overline{M}_w / \overline{M}_n$ ) of 2-50.

25 Japanese Patent L-O-P Publ. Nos. 260602/1985 and 130604/1985 propose processes for polymerizing olefins by using catalysts formed from a transition metal compound and a mixed organoaluminum compound comprising a transition metal compound, aluminoxane and an organoaluminum compound, and disclose that polymerization activity per unit transition metal improves by the addition of the organoaluminum compound.

30 Japanese Patent L-O-P Publ. No. 36390/1987 teaches that aluminoxanes are obtained by reaction of organoaluminum compounds with iron compounds containing water of crystallization, Japanese Patent L-O-P Publ. No. 148491/1987 teaches that aluminoxanes may be obtained by reaction of organoaluminum compounds with compounds containing water of crystallization selected from the group consisting of magnesium compounds, nickel compounds and lanthanide compounds, and Japanese Patent L-O-P Publ. Nos. 56507/1988 and 56508/1988 teach that aluminoxanes can be obtained by reaction of water directly with organoaluminum compounds in inert hydrocarbon solvents utilizing a high speed, high shearing ability 35 induction type impeller or an ultrasonic wave.

In preparing  $\alpha$ -olefin (co)polymers in the manner now described, when the aluminoxane compounds are used as one component of the catalyst therefor,  $\alpha$ -olefin (co)polymers having a narrow molecular weight distribution and a narrow composition distribution can be obtained with excellent polymerization activity.

40 However, a great desideratum for the industry concerned is the advent of such aluminoxane type organoaluminum compounds as having excellent polymerization activity on  $\alpha$ -olefin and as being capable of giving olefin (co)polymers having a narrow molecular weight distribution and a narrow composition distribution.

45 In this connection, known aluminoxane compounds used hitherto in olefin polymerization, even when they are used in a state of liquid or solid, were prepared and recovered as those which are soluble in hydrocarbon solvents such as benzene or toluene, and their molecular weight was determined by cryoscopic methods after dissolving them in benzene and, moreover, a structure of said aluminoxane was decided by measuring a freezing point thereof in benzene.

50 In light of the foregoing points, the present inventors prosecuted extensive researches and eventually have accomplished the present invention on the basis of their finding that novel organoaluminum oxy-compounds prepared from known aluminoxanes or organoaluminum compounds which have not been known at all hitherto and which are insoluble or sparingly soluble in benzene and toluene exhibit excellent catalytic activities in olefin polymerization.

#### OBJECT OF THE INVENTION

55

The present invention has been accomplished in consideration of the prior art as mentioned above, and an object of the invention is to provide novel olefin polymerization catalyst components and olefin polymerization catalysts containing said catalyst components capable of giving olefin (co)polymers having a

narrow molecular weight distribution and a narrow composition distribution, and a process for the polymerization of olefins with said olefin polymerization catalysts.

#### SUMMARY OF THE INVENTION

5 The olefin polymerization catalyst components of the present invention are characterized by comprising an organoaluminum oxy-compound [A] having less than 10% in terms of Al atom of Al component dissolving in benzene kept at 60 °C.

The first olefin polymerization catalyst of the present invention is characterized by comprising  
10 [A] an organoaluminum oxy-compound having less than 10% in terms of Al atom of Al component dissolving in benzene kept at 60 °C, and  
[B] a transition metal compound containing a ligand having a cycloalkadienyl skeleton.

The second olefin polymerization catalyst of the present invention is characterized by comprising  
15 [A] an organoaluminum oxy-compound having less than 10% in terms of Al atom of Al component dissolving in benzene kept at 60 °C,  
[B] a transition metal compound containing a ligand having a cycloalkadienyl skeleton, and  
[C] an organoaluminum compound.

The third olefin polymerization catalyst of the present invention is characterized by comprising  
20 [A] an organoaluminum oxy-compound having less than 10% in terms of Al atom of Al component dissolving in benzene kept at 60 °C,  
[B] a transition metal compound containing a ligand having a cycloalkadienyl skeleton, and  
[D] an aluminoxane having at least one hydrocarbon group other than n-alkyl group bonded to the aluminum atom.

The fourth olefin polymerization catalyst of the present invention is characterized by comprising  
25 [A] an organoaluminum oxy-compound having less than 10% in terms of Al atom of Al component dissolving in benzene kept at 60 °C,  
[B] a transition metal compound containing a ligand having a cycloalkadienyl skeleton,  
[C] an organoaluminum compound, and  
[D] an aluminoxane having at least one hydrocarbon group other than n-alkyl group bonded to the  
30 aluminum atom.

The process for the polymerization of olefins of the present invention is characterized by polymerizing or copolymerizing  $\alpha$ -olefins with the olefin polymerization catalysts as illustrated above.

#### BRIEF DESCRIPTION OF THE DRAWINGS

35 Fig. 1 is a graph showing IR spectrum of the benzene-insoluble organoaluminum oxy-compound used in the present invention.

Fig. 2 is a graph showing IR spectrum of a known benzene-soluble organoaluminum compound.

#### DETAILED DESCRIPTION OF THE INVENTION

The olefin polymerization catalyst components, olefin polymerization catalyst and the process for the polymerization of olefins using said olefin polymerization catalysts are illustrated below in detail.

45 In the present invention, the term "polymerization" is sometimes used in a sense that it includes not only homopolymerization but also copolymerization, and also the term "polymer" is sometimes used in a sense that it includes not only homopolymer but also copolymer.

The olefin polymerization catalyst components of the present invention comprises a benzene-insoluble organoaluminum oxy-compound [A].

#### 50 Benzene-insoluble organoaluminum oxy-compound [A]

The benzene-insoluble organoaluminum oxy-compounds [A] used in the present invention have less than 10%, preferably less than 5% and, in particular, less than 2% in terms of Al atom of Al component dissolving in benzene kept at 60 °C and are insoluble or sparingly soluble in benzene. Namely, Al  
55 component of the organoaluminum oxy-compound [A] dissolving in benzene kept at 60 °C is less than 10%, preferably less than 5% and, in particular, less than 2% in terms of Al atom.

Solubility in benzene of such organoaluminum oxy-compounds as mentioned above is obtained by suspending in 100 ml of benzene said organoaluminum oxy-compound in an amount corresponding to 100

mg atoms in terms of Al atom, mixing the resulting suspension at 60 °C for 6 hours, filtering the resulting mixture with G-5 glass filter equipped with a jacket kept at 60 °C, and washing four times the solids portion separated on the filter with 50 ml of benzene at 60 °C to measure the amount (x mmol) of Al atoms present in the whole filtrate.

5 When the benzene-insoluble organoaluminum oxycompounds of the present invention are analyzed by infrared spectrophotometry (IR), a ratio ( $D_{1260}/D_{1220}$ ) of an absorbance ( $D_{1260}$ ) at around 1260  $\text{cm}^{-1}$  to an absorbance ( $D_{1220}$ ) at around 1220  $\text{cm}^{-1}$  is less than 0.09, preferably less than 0.08 and particularly in the range of from 0.04 to 0.07.

10 Infrared spectrophotometric analysis of the organoaluminum oxy-compounds as referred to in the present specification is carried out in the following manner.

First, the organoaluminum oxy-compound is ground, together with nujol, in an agate mortar in a nitrogen box to paste.

Next, the paste-like sample thus obtained is put between KBr plates, and IR spectrum is measured in a nitrogen atmosphere by means of IR-810 manufactured and sold by Nippon Bunko K.K.

15 IR spectrum of the organoaluminum oxy-compound of the present invention as obtained is shown in Fig. 1.

From the thus obtained IR spectrum, a  $D_{1260}/D_{1220}$  ratio is sought, and a value of said ratio is obtained in the following manner.

20 (a) A line connecting a maximum point at around 1280  $\text{cm}^{-1}$  and a maximum point at around 1240  $\text{cm}^{-1}$  is taken as a base line  $L_1$ .

(b) A transmittance (T %) of an absorption minimum point at around 1260  $\text{cm}^{-1}$  and a transmittance ( $T_0$  %) of a point of intersection are read, said point of intersection being obtained by drawing a vertical line from said absorption minimum point to a wave number abscissa axis (abscissa) and crossing said vertical line with said base line  $L_1$ , whereby an absorbance ( $D_{1260} = \log T_0/T$ ) is calculated.

25 (c) Similarly, a line connecting maximum points at around 1280  $\text{cm}^{-1}$  and at around 1180  $\text{cm}^{-1}$  is taken as a base line  $L_2$ .


(d) A transmittance (T' %) of an absorption minimum point at around 1220  $\text{cm}^{-1}$  and a transmittance ( $T'_0$  %) of a point of intersection are read, said point of intersection being obtained by drawing a vertical line from said absorption minimum point to a wave number abscissa axis (abscissa) and crossing said vertical line with said base line  $L_2$ , whereby an absorbance ( $D_{1220} = \log T'_0/T'$ ) is calculated.

(e) From these values as obtained,  $D_{1260}/D_{1220}$  is calculated.

35 IR spectrum of a known benzene-soluble organoaluminum oxy-compound is shown in Fig. 2. As can be seen from Fig. 2, the benzene-soluble aluminum oxy-compound has a value of  $D_{1260}/D_{1220}$  of being virtually 0.10-0.13, and thus the benzene-insoluble organoaluminum oxy-compound of the present invention is apparently different in the value of  $D_{1260}/D_{1220}$  from the known benzene-soluble organoaluminum oxy-compound.

The benzene-insoluble organoaluminum oxy-compounds of the present invention are presumed to have an alkyloxyaluminum unit represented by the formula

40

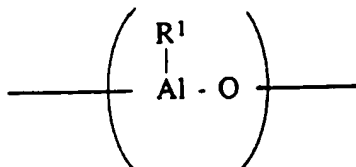


45

wherein  $\text{R}^1$  is a hydrocarbon group of 1 to 12 carbon atoms.

50 In the above-mentioned alkyloxyaluminum unit,  $\text{R}^1$  includes, for example, methyl, ethyl, n-propyl, isopropyl, n-butyl, isobutyl, pentyl, hexyl, octyl, decyl, cyclohexyl and cyclooctyl. Of these hydrocarbon groups exemplified above, preferred are methyl and ethyl, and particularly preferred is methyl.

In addition to the alkyloxyaluminum unit of the formula

55



the benzene-insoluble organoaluminum oxy-compounds of the present invention may contain an oxaluminum unit represented by the formula



10 wherein R<sup>1</sup> is as defined above, and R<sup>2</sup> is a hydrocarbon group of 1 to 12 carbon atoms, an alkoxy group of 1 to 12 carbon atoms, an aryloxy group of 6 to 20 carbon atoms, a hydroxyl group, halogen or hydrogen, provided that R<sup>1</sup> and R<sup>2</sup> are different from each other. In that case, the organoaluminum oxy-compounds desirably contain the alkyloxyaluminum unit



in a proportion of at least 30 mol%, preferably at least 50 mol% and particularly at least 70 mol%.

20 The processes for preparing the benzene-insoluble organoaluminum oxy-compounds [A] as mentioned above are illustrated below in detail.

The above-mentioned benzene-insoluble organoaluminum oxy-compounds [A] are obtained by bringing a solution of aluminoxane into contact with water or an active hydrogen containing compound.

25 The solution of aluminoxane used in the present invention may be prepared, for example, by the following procedures.

(1) The procedure for recovering aluminoxanes as their solution in hydrocarbons which comprises reacting organoaluminum compounds such as trialkylaluminum with suspensions in hydrocarbon solvents of compounds having absorbed water or salts containing water of crystallization, for example, hydrates of magnesium chloride, copper sulfate, aluminum sulfate, nickel sulfate or cerous chloride.


30 (2) The procedure for recovering aluminoxanes as their solution in hydrocarbons which comprises allowing organoaluminum compounds such as trialkylaluminum to interact directly with water, ice or water vapor in solvents such as benzene, toluene, ethyl ether and tetrahydrofuran.

35 In this connection, aluminoxane of the above-mentioned solution of aluminoxane may contain small amount of organometallic components. Furthermore, the solution of aluminoxane recovered by the above-mentioned procedures may be distilled to remove therefrom the solvent or unreacted organoaluminum compound, followed by dissolving again in solvents.

40 The organoaluminum compounds used for preparing such solutions of aluminoxane as mentioned above include, for example, trialkylaluminum such as trimethylaluminum, triethylaluminum, tripropylaluminum, triisopropylaluminum, tri-n-butylaluminum, triisobutylaluminum, tri-sec-butylaluminum, tri-tert-butylaluminum, tri-pentylaluminum, trihexylaluminum, trioctylaluminum, tridecylaluminum, tricyclohexylaluminum, tricyclooctylaluminum; dialkylaluminum halides such as dimethylaluminum chloride, diethylaluminum chloride, diethylaluminum bromide and diisobutylaluminum chloride; dialkylaluminum hydrides such as diethylaluminum hydride and diisobutylaluminum hydride; dialkylaluminum alkoxides such as dimethylaluminum methoxide and diethylaluminum ethoxide; and dialkylaluminum aryloxides such as diethylaluminum phenoxide.

45 Of the organoaluminum compounds as exemplified above, particularly preferred is trialkylaluminum.

Furthermore, there may also be used as the organoaluminum compound isoprenylaluminum represented by the general formula



wherein x, y and z are each a positive number, and  $z \geq 2x$ .

The organoaluminum compounds mentioned above may be used either singly or in combination.

55 Solvents used in the solutions of aluminoxane include aromatic hydrocarbons such as benzene, toluene, xylene, cumene and cymene; aliphatic hydrocarbons such as pentane, hexane, heptane, octane, decane, dodecane, hexadecane and octadecane; alicyclic hydrocarbons such as cyclopentane, cyclohexane, cyclooctane and methylcyclopentane; petroleum fractions such as gasoline, kerosene and gas oil; or halogenated hydrocarbons such as halides, particularly chloride and bromides, of the above-mentioned



aromatic, aliphatic and alicyclic hydrocarbons. In addition thereto, there may also be used ethers such as ethyl ether and tetrahydrofuran. Of these solvents as exemplified above, particularly preferred are aromatic hydrocarbons.

In the present invention, as mentioned above, the benzene-insoluble organoaluminum oxy-compounds [A] are obtained by bringing the above-mentioned solution of aluminoxane into contact with water or an active hydrogen containing compound.

The active hydrogen containing compounds used in the present invention include alcohols such as methanol, ethanol, n-propanol and isopropanol; diols such as ethylene glycol and hydroquinone; and organic acids such as acetic acid and propionic acid. Of these compounds, preferred are alcohols and diols, and especially preferred are alcohols.

Water or the active hydrogen containing compounds with which the solution of aluminoxane is brought into contact may be used as solutions or dispersions in hydrocarbon solvents such as benzene, toluene and hexane, ether solvents such as tetrahydrofuran or amine solvents such as triethylamine, or may be used in the form of vapor or solid. The water with which the solution of aluminoxane is brought into contact may be water of crystallization of salts such as magnesium chloride, magnesium sulfate, aluminum sulfate, copper sulfate, nickel sulfate, iron sulfate and cerous chloride, or absorbed water absorbed to inorganic compounds such as silica, alumina and aluminum hydroxide or polymers.

Reaction of the solution of aluminoxane with water or the active hydrogen containing compounds is carried out usually in solvents, for example, hydrocarbon solvents. The solvents used in this case are aromatic hydrocarbons such as benzene, toluene, xylene, cumene and cymene; aliphatic hydrocarbons such as pentane, hexane, heptane, octane, decane, dodecane, hexadecane and octadecane; alicyclic hydrocarbons such as cyclopentane, cyclohexane, cyclooctane and methylcyclohexane; petroleum fractions such as gasoline, kerosene and gas oil; halogenated hydrocarbons such as halides of the above-mentioned aromatic hydrocarbons, aliphatic hydrocarbons and alicyclic hydrocarbons, particularly, chlorides and bromides; and ethers such as ethyl ether and tetrahydrofuran. Of these solvents as exemplified above, particularly preferred are aromatic hydrocarbons.

In the reaction as mentioned above, water or the active hydrogen containing compound is used in an amount of 0.1-5 moles, preferably 0.2-3 moles to 1 mole of Al atoms present in the solution of aluminoxane. A concentration in terms of aluminum atom in the reaction system is desirably  $1 \times 10^{-3}$  - 5 gram atom/l, preferably  $1 \times 10^{-2}$  - 3 gram atom/l, and a concentration of water in the reaction system is desirably  $2 \times 10^{-4}$  - 5 mol/l, preferably  $2 \times 10^{-3}$  - 3 mol/l.

The solution of aluminoxane may be brought into contact with water or the active hydrogen containing compound, for example, by the following procedures.

- (1) The procedure which comprises bringing the solution of aluminoxane into contact with a hydrocarbon solvent containing water or the active hydrogen containing compound.
- (2) The procedure which comprises blowing vapor of water or the active hydrogen containing compound into the solution of aluminoxane, thereby bringing the aluminoxane into contact with the vapor.
- (3) The procedure which comprises bringing the solution of aluminoxane into contact directly with water, ice or the active hydrogen containing compound.
- (4) The procedure which comprises mixing the solution of aluminoxane with a suspension of an absorbed water containing compound or a water of crystallization containing compound in hydrocarbon, or with a suspension of a compound, to which the active hydrogen containing compound has been absorbed, in hydrocarbon, thereby bringing the aluminoxane into contact with the absorbed water or water of crystallization or the active hydrogen containing compound.

The solution of aluminoxane may contain other components so long as they do not exert adverse effects on the reaction of aluminoxane with water or the active hydrogen containing compound.

The above-mentioned reaction of the solution of aluminoxane with water or the active hydrogen containing compound is carried out usually at -50 to 150 °C, preferably 0-120 °C and more desirably at 20-100 °C. The reaction time employed is usually 0.5-300 hours, preferably 1-150 hours, though said reaction time varies largely depending upon the reaction temperature used.

The benzene-insoluble organoaluminum oxy-compounds [A] used in the present invention may also be obtained directly by bringing the above-mentioned organoaluminum into contact with water. In this case, the water is used in such an amount that the organoaluminum atoms dissolved in the reaction system become less than 20% based on the total organoaluminum atoms.

The water which is brought into contact with the organoaluminum compound may be used after dissolving or dispersing it in hydrocarbon solvents such as benzene, toluene and hexane, ether solvents such as tetrahydrofuran or amine solvents such as triethylamine, or may be used in the form of water vapor or ice. Furthermore, as the water, there may also be used water of crystallization of salts such as

magnesium chloride, magnesium sulfate, aluminum sulfate, copper sulfate, nickel sulfate, iron sulfate and cerous chloride, or absorbed water absorbed to inorganic compounds such as silica, alumina and aluminum hydroxide or polymers.

The reaction of the organoaluminum compound with water is carried out usually in hydrocarbon solvents. In this case, the hydrocarbon solvents used include aromatic hydrocarbons such as benzene, toluene, xylene, cumene and cymene, aliphatic hydrocarbons such as butane, isobutane, pentane, hexane, heptane, octane, decane, dodecane, hexadecane and octadecane, alicyclic hydrocarbons such as cyclopentane, cyclohexane, cyclooctane, cyclodecane, cyclododecane and methylcyclohexane, petroleum fractions such as gasoline, kerosene or gas oil, or halides, particularly chlorides and bromides, of the above-mentioned aromatic, aliphatic and alicyclic hydrocarbons. In addition thereto, there may also be used ethers such as ethyl ether and tetrahydrofuran. Of these solvents as exemplified above, particularly preferred are aromatic hydrocarbons.

Desirably, a concentration in terms of aluminum atom of the organoaluminum compound in the reaction system is usually  $1 \times 10^{-3}$  - 20 mol/l, preferably  $1 \times 10^{-3}$  - 10 mol/l, further preferably  $1 \times 10^{-3}$  - 5 gram atom/l, and  $1 \times 10^{-2}$  - 3 gram atom/l in particular, and a concentration of water in the reaction system is usually  $1 \times 10^{-3}$  - 5 mol/l and preferably  $1 \times 10^{-2}$  - 3 mol/l. In this case, the aluminum atoms dissolved in the reaction system is desirably less than 20%, preferably less than 10% and further preferably 0 - 5% based on the total organoaluminum atoms.

The organoaluminum compound may be brought into contact with water, for example, by the following procedures.

- (1) The procedure which comprises bringing a hydrocarbon solution of organoaluminum into contact with a hydrocarbon solution containing water.
- (2) The procedure which comprises blowing water vapor into a hydrocarbon solution of organoaluminum, thereby bringing the organoaluminum to contact with water.
- (3) The procedure which comprises mixing a hydrocarbon solution of organoaluminum with a hydrocarbon suspension of an absorbed water containing compound or a water of crystallization containing compound, thereby bringing the organoaluminum into contact with the absorbed water or water of crystallization.
- (4) The procedure which comprises bringing a hydrocarbon solution of organoaluminum into contact with ice.

The above-mentioned hydrocarbon solution of organoaluminum may contain other components so long as they do not exert adverse effects on the reaction of the organoaluminum with water.

The reaction of the organoaluminum compound with water is carried out usually at a temperature of  $-100$  -  $150^\circ\text{C}$ , preferably  $-70$  -  $100^\circ\text{C}$  and further preferably  $-50$  -  $80^\circ\text{C}$ . The reaction time, though it varies largely depending upon the reaction temperature employed, is usually 1 - 200 hours, preferably 2 - 100 hours.

The olefin polymerization catalysts of the present invention are illustrated hereinafter.

The first olefin polymerization catalyst of the present invention comprises the above-mentioned organoaluminum oxy-compound [A] having less than 10% in terms of Al atom of Al component dissolving in benzene ketp at  $60^\circ\text{C}$ , and a transition metal compound [B] containing a ligand having a cycloalkadienyl skeleton.

The transition metal compound [B] as mentioned above is illustrated below in detail.

#### Transition metal compound [B]

The transition metal compound [B] used in the present invention is represented by the formula  $ML_x$  wherein M is a transition metal, L is a ligand coordinating to the transition metal, at least one of L is a ligand having a cycloalkadienyl skeleton, L other than the ligand having a cycloalkadienyl skeleton is a hydrocarbon group of 1-12 carbon atoms, an alkoxy group, an aryloxy group, halogen or hydrogen, and x is a valence of the transition metal.

In the above-mentioned formula, M which is a transition metal includes zirconium, titanium, hafnium, chromium or vanadium by preference, and particularly preferred are zirconium and hafnium.

The ligands having a cycloalkadienyl skeleton include, for example, cyclopentadienyl, alkyl-substituted cyclopentadienyl groups such as methylcyclopentadienyl, ethylcyclopentadienyl, n-butylcyclopentadienyl, dimethylcyclopentadienyl and pentamethylcyclopentadienyl, and an indenyl group, 4,5,6,7-tetrahydroindenyl group and a fluorenyl group.

Two or more ligands having a cycloalkadienyl skeleton as mentioned above may coordinate to the transition metal and, in this case, at least two ligands having a cycloalkadienyl skeleton may be bonded

together via a lower alkylene group.

The ligand other than those having a cycloalkadienyl skeleton is a hydrocarbon group of 1-12 carbon atoms, an alkoxy group, an aryloxy group, halogen or hydrogen.

The hydrocarbon group having 1-12 carbon atoms mentioned above includes, for example, alkyl, cycloalkyl, aryl and aralkyl, and the alkyl group includes methyl, ethyl, propyl, isopropyl and butyl.

The cycloalkyl group mentioned above includes, for example, cyclopentyl and cyclohexyl, the aryl group includes, for example, phenyl and tolyl, and the aralkyl group includes, for example, benzyl and neophyl.

The alkoxy group mentioned above includes, for example, methoxy, ethoxy and butoxy, and the aryloxy group includes, for example, phenoxy.

The halogen mentioned above includes, for example, fluorine, chlorine, bromine and iodine.

Such transition metal compounds [B] containing ligands having a cycloalkadienyl skeleton as used in the present invention, for example, the transition metal thereof has a valence of 4, may be represented more concretely by the formula



wherein M is zirconium, titanium, hafnium or vanadium,  $R^2$  is a group having a cycloalkadienyl skeleton,  $R^3$ ,  $R^4$  and  $R^5$  are each a group having a cycloalkadienyl skeleton, an alkyl, cycloalkyl, aryl, aralkyl, alkoxy or aryloxy group, halogen or hydrogen, k is an integer of at least 1, and  $k+l+m+n=4$ .

Transition metal compounds are those of the above-mentioned formula  $R^2_k R^3_l R^4_m R^5_n M$  in which at least two of  $R^2$ ,  $R^3$ ,  $R^4$  and  $R^5$ , that is,  $R^2$  and  $R^3$  are each a group having a cycloalkadienyl skeleton, said two groups having a cycloalkadienyl skeleton may be bonded to each other via lower alkylene, for example, methylene, ethylene, propylene or the like, and  $R^4$  and  $R^5$  may be each a group having a cycloalkadienyl skeleton, an alkyl, cycloalkyl, aryl, aralkyl, alkoxy or aryloxy group, halogen or hydrogen.

Listed below are typical representatives of the transition metal compounds [B] having a cycloalkadienyl skeleton, represented by the aforementioned formula  $ML_x$  in which M is zirconium.

Bis(cyclopentadienyl)zirconium monochloride monohydride,  
 Bis(cyclopentadienyl)zirconium monobromide monohydride,  
 Bis(cyclopentadienyl)methyl zirconium hydride,  
 Bis(cyclopentadienyl)ethyl zirconium hydride,  
 Bis(cyclopentadienyl)phenyl zirconium hydride,  
 Bis(cyclopentadienyl)benzyl zirconium hydride,  
 Bis(cyclopentadienyl)neopentyl zirconium hydride,  
 Bis(methylcyclopentadienyl)zirconium monochloride hydride,  
 Bis(indenyl)zirconium monochloride monohydride,  
 Bis(cyclopentadienyl)zirconium dichloride,  
 Bis(cyclopentadienyl)zirconium dibromide,  
 Bis(cyclopentadienyl)methyl zirconium monochloride,  
 Bis(cyclopentadienyl)ethyl zirconium monochloride,  
 Bis(cyclopentadienyl)cyclohexyl zirconium monochloride,  
 Bis(cyclopentadienyl)phenyl zirconium monochloride,  
 Bis(cyclopentadienyl)benzyl zirconium monochloride,  
 Bis(methylcyclopentadienyl)zirconium dichloride,  
 Bis(n-butylcyclopentadienyl)zirconium dichloride,  
 Bis(indenyl)zirconium dichloride,  
 Bis(indenyl)zirconium dibromide,  
 Bis(cyclopentadienyl)zirconium dimethyl,  
 Bis(cyclopentadienyl)zirconium diphenyl,  
 Bis(cyclopentadienyl)zirconium dibenzyl,  
 Bis(cyclopentadienyl)zirconium methoxychloride,  
 Bis(cyclopentadienyl)zirconium ethoxychloride,  
 Bis(methylcyclopentadienyl)zirconium ethoxychloride,  
 Bis(cyclopentadienyl)zirconium phenoxychloride,  
 Bis(flourenyl)zirconium dichloride,

Listed below are typical representatives of the transition metal compounds [B] of the above-mentioned formula in which M is zirconium and which contain at least two ligands having a cycloalkadienyl skeleton, said ligands being bonded together via lower alkylene groups.

Ethylenebis(indenyl)dimethyl zirconium,  
 Ethylenebis(indenyl)diethyl zirconium,  
 Ethylenebis(indenyl)diphenyl zirconium,  
 Ethylenebis(indenyl)methyl zirconium monochloride,  
 5 Ethylenebis(indenyl)ethyl zirconium monochloride,  
 Ethylenebis(indenyl)methyl zirconium monobromide,  
 Ethylenebis(indenyl)zirconium dichloride,  
 Ethylenebis(indenyl)zirconium dibromide,  
 Ethylenebis(indenyl)zirconium methoxy monochloride,  
 10 Ethylenebis(indenyl)zirconium ethoxy monochloride,  
 Ethylenebis(indenyl)zirconium phenoxy monochloride,  
 Ethylenebis(cyclopentadienyl)zirconium dichloride,  
 Propylenebis(cyclopentadienyl)zirconium dichloride,  
 Ethylenebis(t-butylcyclopentadienyl)zirconium dichloride,  
 15 Ethylenebis(4,5,6,7-tetrahydro-1-indenyl)dimethyl zirconium,  
 Ethylenebis(4,5,6,7-tetrahydro-1-indenyl)methyl zirconium monochloride,  
 Ethylenebis(4,5,6,7-tetrahydro-1-indenyl)zirconium dichloride,  
 Ethylenebis(4,5,6,7-tetrahydro-1-indenyl)zirconium dibromide,  
 Ethylenebis(4-methyl-1-indenyl)zirconium dichloride,  
 20 Ethylenebis(5-methyl-1-indenyl)zirconium dichloride,  
 Ethylenebis(6-methyl-1-indenyl)zirconium dichloride,  
 Ethylenebis(7-methyl-1-indenyl)zirconium dichloride,  
 Ethylenebis(5-methoxy-1-indenyl)zirconium dichloride,  
 Ethylenebis(2,3-dimethyl-1-indenyl)zirconium dichloride,  
 25 Ethylenebis(4,7-dimethyl-1-indenyl)zirconium dichloride,  
 Ethylenebis(4,7-dimethoxy-1-indenyl)zirconium dichloride.

There may also be used transition metal compounds obtained by replacing the zirconium metal in the above-exemplified zirconium compounds with titanium metal, hafnium metal, or vanadium metal.

These transition metal compounds may also be used in admixture of two or more.

30 In the present invention, polymers which are particularly high in stereoregularity are obtained when such ethylenebisindenyl type zirconium or hafnium compounds are used as the transition metal compounds [B] containing at least two ligands having a cycloalkadienyl skeleton, said ligands being bonded together via lower alkylene groups.

The second olefin polymerization catalyst of the present invention is illustrated below.

35 This olefin polymerization catalyst comprises the above-mentioned organoaluminum oxy-compound [A] having less than 10% in terms of Al atom of Al component dissolving in benzene kept at 60 °C, the above-mentioned transition metal compound [B] containing a ligand having a cycloalkadienyl skeleton, and an organoaluminum compound [C].

The organoaluminum compound [C] is illustrated below in detail.

40

#### Organoaluminum compound [C]

The organoaluminum compound [C] used in the present invention is represented by the formula  $R^6_m AlX_{3-m}$  wherein  $R^6$  is hydrocarbon of 1-12 carbon atoms, X is halogen and m is 1-3, or the formula  
 45  $R^6_n AlY_{3-n}$  wherein  $R^6$  is as defined above, Y is hydrogen,  $-OR^7$ ,  $-OSiR^8_3$ ,  $-OAlR^9_2$ ,

50



$-NR^{12}_2$  or  $SiR^{13}_3$ , n is 1-2 and  $R^7$  through  $R^{13}$  are each hydrogen, halogen or hydrocarbon.

In the above-mentioned formula,  $R^6$  is hydrocarbon of 1-12 carbon atoms, for example, alkyl, cycloalkyl or aryl, including concretely methyl, ethyl, n-propyl, isopropyl, isobutyl, pentyl, hexyl, octyl, decyl, cyclopentyl, cyclohexyl, phenyl, and tolyl.

The organoaluminum compounds of the formula  $R^6_m AlX_{3-m}$  include, in concrete, such compounds as mentioned below.

Trialkylaluminum such as trimethylaluminum, triethylaluminum, triisopropylaluminum, triisobutylaluminum, trihexylaluminum, trioctylaluminum, and tri-2-ethylhexylaluminum.

Alkenylaluminum such as isoprenylaluminum, etc.

Dialkylaluminum halides such as dimethylaluminum chloride, diethylaluminum chloride, diisopropylaluminum chloride, diisobutylaluminum chloride, and diisobutylaluminum bromide.

Alkylaluminum sesquihalides such as methylaluminum sesquichloride, ethylaluminum sesquichloride, isopropylaluminum sesquichloride, isobutylaluminum sesquichloride, and ethylaluminum sesquibromide.

Alkylaluminum dihalides such as methylaluminum dichloride, ethylaluminum dichloride, isopropylaluminum dichloride, isobutylaluminum dichloride, and ethylaluminum dibromide.

The organoaluminum compounds of the formula  $R^6_nAlY_{3-n}$  include, in concrete, such compounds as enumerated below.

(i) Compounds of the formula  $R^6_nAl(OR^7)_{3-n}$  such as dimethylaluminum methoxide, diethylaluminum ethoxide, diisobutylaluminum butoxide, and diisobutylaluminum methoxide.


(ii) Compounds of the formula  $R^6_nAl(OSiR^8_3)_{3-n}$  such as  $(C_2H_5)_2AlOSi(CH_3)_3$ ,  $(iso-C_4H_9)_2AlOSi(CH_3)_3$ , and  $(iso-C_4H_9)_2AlOSi(C_2H_5)_3$ .

(iii) Compounds of the formula  $R^6_nAl(OAIR^9_2)_{3-n}$  such as  $(C_2H_5)_2AlOAl(C_2H_5)_2$ , and  $(iso-C_4H_9)_2AlOAl(iso-C_4H_9)_2$ .

(iv) Compounds of the formula



such as



and

and



(v) Compounds of the formula  $R^6_nAl(NR^{12}_2)_{3-n}$  such as  $(CH_3)_2AlN(C_2H_5)_2$ ,  $(C_2H_5)_2AlNHCH_3$ ,  $(CH_3)_2AlNH(C_2H_5)$ ,  $(C_2H_5)_2AlN(Si(CH_3)_3)_2$ , and  $(iso-C_4H_9)_2AlN(Si(CH_3)_3)_2$ .

(vi) Compounds of the formula  $R^6_nAl(SiR^{13}_3)_{3-n}$  such as  $(iso-C_4H_9)_2AlSi(CH_3)_3$ .

Of the organoaluminum compounds as exemplified above, preferred are those of the formula  $R^6_3Al$ ,  $R^6_2Al(OR^7)$  or  $R^6_2Al(OAIR^9_2)$ , and particularly preferred are those of the formula  $R^6_3Al$ ,  $R^6_2Al(OR^7)$  or  $R^6_2Al(OAIR^9_2)$  in which  $R^6$  is a branched chain alkyl group. Concretely, particularly preferred are triisobutylaluminum compounds such as triisobutylaluminum, tri-2-ethylhexylaluminum and the like.

These organoaluminum compounds may be used alone or in combination.

The third olefin polymerization catalyst of the present invention is illustrated below.

This olefin polymerization catalyst comprises the above-mentioned organoaluminum oxy-compound [A] having less than 10% in terms of Al atoms of Al component dissolving in benzene kept at 60 °C, the above-mentioned transition metal compound [B] containing a ligand having a cycloalkadienyl skeleton, and an aluminoxane [D] having at least one hydrocarbon group other than n-alkyl group bonded to the aluminum atom.

This aluminoxane [D] is illustrated below in detail.

Aluminoxane [D] having at least one hydrocarbon group other than n-alkyl bonded to the aluminum atom

The aluminoxane used in the present invention has at least one hydrocarbon group other than n-alkyl group bonded to the aluminum atom.

Such aluminoxane as mentioned above may be prepared, for example, by the following procedures.

(1) A method which comprises reacting a suspension of a compound containing water of absorption or a salt containing water of crystallization, for example, magnesium chloride hydrate, copper sulfate hydrate, aluminum sulfate hydrate, nickel sulfate hydrate or cerous chloride hydrate, in a hydrocarbon medium with an organoaluminum compound having at least one hydrocarbon group other than n-alkyl group bonded to the aluminum atom such as trialkylaluminum.

(2) A method which comprises reacting an organoaluminum compound having at least one hydrocarbon group other than n-alkyl group bonded to the aluminum atom such as trialkylaluminum directly with water, ice or water vapor in a medium such as benzene, toluene, ethyl ether or tetrahydrofuran.

The aluminoxane prepared by these methods may contain small amounts of organometallic components. The above-mentioned solution of aluminoxane recovered may be distilled to remove the solvent or unreacted organoaluminum compound therefrom, followed by dissolving again in a solvent.

The organoaluminum compounds used in the preparation of the aluminoxane having at least one hydrocarbon group other than n-alkyl group bonded to the aluminum atom contain at least one hydrocarbon group other than n-alkyl group. The hydrocarbon group other than n-alkyl group includes, for example, branched chain alkyl such as isoalkyl, cycloalkyl and aryl.

Typical representatives of such organoaluminum compounds as mentioned above include, in concrete, trialkylaluminum such as triisopropylaluminum, triisobutylaluminum, tri-2-methylbutylaluminum, tri-3-methylbutylaluminum, tri-2-methylpentylaluminum, tri-3-methylpentylaluminum, tri-4-methylpentylaluminum, tri-2-methylhexylaluminum, tri-3-methylhexylaluminum and tri-2-ethylhexylaluminum; tricycloalkylaluminum such as tricyclohexylaluminum; and triarylaluminum such as triphenylaluminum, tritolylaluminum; dialkylaluminum hydride such as diisobutylaluminum hydride; alkylaluminum alkoxide such as isobutylaluminum methoxide, isobutylaluminum ethoxide, isobutylaluminum isopropoxide. Of the organoaluminum compounds exemplified above, preferred are trialkylaluminum compounds having a branched alkyl, and particularly preferred are triisobutylaluminum compounds.

The above-mentioned aluminoxane having at least one hydrocarbon group other than n-alkyl group bonded to the aluminum atom has a solubility in benzene kept at 23° C of at least 1 gram atom-Al/l, and is soluble in benzene.

The fourth olefin polymerization catalyst of the present invention is illustrated below.

This olefin polymerization catalyst comprises the above-mentioned organoaluminum oxy-compound [A] having less than 10% in terms of Al atom of Al component dissolving in benzene kept at 60° C, the above mentioned transition metal compound [B] containing a ligand having a cycloalkadienyl skeleton, the above-mentioned organoaluminum compound [C], and an aluminoxane [D] having at least one hydrocarbon group other than n-alkyl group bonded to the aluminum atom.

#### Polymerization of olefins

In the present invention, polymers are prepared by polymerizing or copolymerizing  $\alpha$ -olefins with olefin polymerization catalysts as mentioned above.

Olefins which can be polymerized by the use of the olefin polymerization catalysts of the present invention include ethylene and  $\alpha$ -olefins of 3 to 20 carbon atoms, for example, propylene, 1-butene, 1-hexene, 4-methyl-1-pentene, 1-octene, 1-decene, 1-dodecene, 1-pentene, 1-tetradecene, 1-hexadecene, 1-octadecene, 1-eicocene, cyclopentene, cycloheptene, norbornene, 5-methyl-2-norbornene, tetracyclododecene, and 2-methyl-1,4,5,8-dimethano-1,2,3,4,4a,5,8,8a-octahydronaphthalene.

Furthermore, there may be also used styrene, vinylcyclohexane and diene.

In the present invention, polymerization may be carried out by liquid phase polymerization such as solution polymerization and suspension polymerization, or by gas phase polymerization.

A temperature at which olefin is polymerized with such olefin polymerization catalysts as mentioned above is usually from -50 to 200° C, preferably from 0 to 150° C. The polymerization is carried out usually at a pressure in the range of from ordinary pressure to 98 bar (100 kg/cm<sup>2</sup>), preferably from ordinary pressure to 49 bar (50 kg/cm<sup>2</sup>), and the polymerization reaction may be carried out by batch method, semi-continuous method or continuous method. The polymerization can also be carried out under different reaction conditions, dividing into two or more stages. A molecular weight of the resulting olefin polymers may be regulated by making hydrogen present in the polymerization system or by varying the polymerization temperature.

In the practice of polymerization of olefins with the above-mentioned first polymerization catalyst of the present invention as mentioned above, it is desirable to use the benzene-insoluble organoaluminum oxy-compound [A] in an amount of usually 10<sup>-6</sup> - 0.1 gram atom-Al/l, preferably 10<sup>-5</sup> - 10<sup>-2</sup> gram atom Al/l,

and the transition metal compound [B] containing a ligand having a cycloalkadienyl skeleton in an amount of usually  $10^{-8}$  -  $10^{-3}$  mol/l, preferably  $10^{-7}$  -  $10^{-4}$  mol/l.

Similarly, in the case of the second olefin polymerization catalyst of the invention, the benzene-insoluble organoaluminum oxy-compound [A] is used in an amount of usually  $10^{-6}$  - 0.1 gram atom-Al/l, preferably  $10^{-5}$  -  $10^{-2}$  gram atom-Al/l, the transition metal compound [B] containing a ligand having a cycloalkadienyl skeleton in an amount of usually  $10^{-8}$  -  $10^{-3}$  mol/l, preferably  $10^{-7}$  -  $10^{-4}$  mol/l, and the organoaluminum compound [C] in an amount of usually  $10^{-5}$  - 0.1 mol/l, preferably  $10^{-4}$  -  $10^{-2}$  mol/l. Furthermore, a ratio (in terms of Al atom) of the benzene-insoluble organoaluminum oxy-compound [A] to the organoaluminum compound [C] is desirably in the range of from 0.01 to 5, preferably from 0.02 to 2.

In the case of the third olefin polymerization catalyst of the invention, similarly, the benzene-insoluble organoaluminum oxy-compound [A] is used in an amount of usually  $10^{-6}$  - 0.1 gram atom-Al/l, preferably  $10^{-5}$  -  $10^{-2}$  gram atom-Al/l, the transition metal compound [B] containing a ligand having a cycloalkadienyl skeleton in an amount of usually  $10^{-8}$  -  $10^{-3}$  mol/l, preferably  $10^{-7}$  -  $10^{-4}$  mol/l, and the above-mentioned aluminosilicate [D] in an amount of usually  $10^{-5}$  - 0.1 gram atom-Al/l, preferably  $10^{-4}$  -  $10^{-2}$  gram atom-Al/l. Furthermore, a ratio (in terms of Al atom) of the benzene-insoluble organoaluminum oxy-compound [A] to the aluminosilicate [D] is desirably in the range of from 0.01 to 5, preferably from 0.02 to 2.

Further, in the case of the fourth olefin polymerization catalyst of the invention, similarly, the benzene-insoluble organoaluminum oxy-compound [A] is used in an amount of usually  $10^{-6}$  - 0.1 gram atom-Al/l, preferably  $10^{-5}$  -  $10^{-2}$  gram atom-Al/l, the transition metal compound [B] containing a ligand having a cycloalkadienyl skeleton in an amount of usually  $10^{-8}$  -  $10^{-3}$  mol/l, preferably  $10^{-7}$  -  $10^{-3}$  mol/l, and the organoaluminum compound [C] in an amount of usually  $10^{-5}$  - 0.1 mol/l, preferably  $10^{-4}$  -  $10^{-2}$  mol/l. Further, the aluminosilicate [D] is desirably used in an amount of usually  $10^{-5}$  - 0.1 gram atom-Al/l, preferably  $10^{-4}$  -  $10^{-2}$  gram atom-Al/l. Furthermore, a ratio (in terms of Al atom) of the benzene-insoluble organoaluminum oxy-compound [A] to the organoaluminum compound [C] is desirably in the range of from 0.01 to 5, preferably from 0.02 to 2, and a ratio (in terms of Al atom) of the benzene-insoluble organoaluminum oxy-compound [A] to the aluminosilicate [D] is in the range of from 0.01 to 5, preferably from 0.02 to 2.

The olefin polymerization catalysts of the present invention have excellent polymerization activities. That is, the olefin polymerization catalysts of the invention are capable of giving olefin polymers per unit weight of the organoaluminum oxy-compound about 1.2-20 times the amount of the polymer obtained by the use of known olefin polymerization catalysts composed of benzene-soluble aluminosilicate and metallocene compounds. Further, the olefin polymerization catalysts of the invention can give polymers having a high molecular weight in comparison with those obtained with the known olefin polymerization catalysts composed of benzene-soluble aluminosilicate and metallocene compounds.

Furthermore, olefin (co)polymers having a narrow molecular weight distribution and a narrow composition distribution may be obtained by copolymerizing olefins with the olefin polymerization catalysts of the invention.

In the present invention, moreover, the olefin polymerization catalysts may contain also components useful for olefin polymerization in addition to such components as mentioned hereinbefore.

The present invention is illustrated below with reference to examples, but it should be construed that the invention is in no way limited to those examples.

#### Example 1

##### [Preparation of aluminosilicate]

A 400 ml flask thoroughly purged with nitrogen was charged with 37 g of  $\text{Al}_2(\text{SO}_4)_3 \cdot 14\text{H}_2\text{O}$  and 125 ml of toluene, cooled to  $0^\circ\text{C}$ , and 500 mmoles of trimethylaluminum diluted with 125 ml of toluene was added dropwise. The temperature of the flask was elevated to  $40^\circ\text{C}$ , and the reaction was continued at that temperature for 10 hours. After the completion of the reaction, the reaction mixture was subjected to solid-liquid separation by filtration, and the toluene was removed from the filtrate, whereby 12 g of white solid aluminosilicate was obtained.

##### [Preparation of benzene-insoluble organoaluminum oxy-compound]

55

A 400 ml glass flask thoroughly purged with nitrogen was charged with 59.7 ml of toluene, 40.3 ml of a solution of aluminosilicate in toluene (Al 2.48 moles-Al/l) and 25 g of Teflon column ( $\phi$  2 mm x 1.2 mm) as a dispersing agent. Thereafter, the flask was cooled to  $-5^\circ\text{C}$ , and gradually charged with 0.72 ml of water by

means of a pipette. Successively, the reaction was carried out at  $-5^{\circ}\text{C}$  for 40 minutes, the temperature was then elevated up to  $80^{\circ}\text{C}$  over a period of 1 hour, and the reaction was continued at that temperature for 3 hours. After this 3-hour reaction, the Teflon columns were removed by screening from the reaction mixture, and said reaction mixture was subjected to solid-liquid separation by filtration to obtain a benzene-insoluble organoaluminum oxy-compound. A concentration of aluminum dissolved in the filtrate was measured, whereby the measured concentration was less than the detection limit of 5 mg-Al/l.

To a 200 ml reactor equipped with a stirrer were added 100 mg in terms of Al atom of the thus obtained benzene-insoluble organoaluminum oxy-compound and 100 ml of benzene, and the mixture was stirred at  $60^{\circ}\text{C}$  for 6 hours to prepare a suspension. With G5 glass filter equipped with a jacket, the suspension was filtered, while maintaining silicone oil poured in the jacket at  $60^{\circ}\text{C}$ , and the compound on glass filter was then washed with 50 ml of benzene kept at  $60^{\circ}\text{C}$  four times. The filtrate was recovered, and an amount of Al present in the filtrate was measured, whereby Al corresponding to 0.7 mmole was detected. That is, it was considered that the amount of Al component of the above-mentioned organoaluminum oxy-compound which dissolves in benzene kept at  $60^{\circ}\text{C}$  is 0.7% in terms of Al atom. Further, IR measurement of the solid organoaluminum oxy-compound obtained above was conducted, whereby an absorption of Al-O-Al atom group was observed in the IR spectrum at  $600\text{--}800\text{ cm}^{-1}$ , and a ( $D_{1260}/D_{1220}$ ) ratio of an absorbance ( $D_{1260}$ ) at  $1260\text{ cm}^{-1}$  to an absorbance ( $D_{1220}$ ) at  $1220\text{ cm}^{-1}$  was 0.053. Evolution of methane was observed when the solid organoaluminum oxy-compound was decomposed with water.

[Polymerization]

A 2 liter stainless steel autoclave thoroughly purged with nitrogen was charged with 900 ml of 4-methyl-1-pentene, followed by rise in temperature up to  $130^{\circ}\text{C}$ . Into the autoclave were injected 1.14 ml of a suspension of the benzene-insoluble organoaluminum oxy-compound prepared above in toluene (0.44 mole-Al/l) and 1 ml of a solution of bis(methylcyclopentadienyl)zirconium dichloride in toluene (0.001 mole-Zr/l) together with ethylene to initiate polymerization. The polymerization was carried out at the total pressure of  $20\text{ kg/cm}^2\text{-G}$  and  $140^{\circ}\text{C}$  for 30 minutes while continuously feeding ethylene to the polymerization system, whereby 12.0 g of an ethylene/4-methyl-1-pentene copolymer having an intrinsic viscosity  $[\eta]$  of 0.47 dl/g as measured at  $135^{\circ}\text{C}$  in decalin, a density of  $0.908\text{ g/cm}^3$  and  $\bar{M}_w/\bar{M}_n$  of 2.4 was obtained.

#### Comparative Example 1

The polymerization of Example 1 was carried out in the same manner as in Example 1 except that in place of the benzene-insoluble organoaluminum oxy-compound, there was used the solution of the aluminoxane in toluene prepared in Example 1 in an amount of 0.5 mg atom in terms of Al atom, whereby 8.4 g of an ethylene/4-methyl-1-pentene copolymer having an intrinsic viscosity  $[\eta]$  of 0.41 dl/g, a density of  $0.910\text{ g/cm}^3$  and  $\bar{M}_w/\bar{M}_n$  of 2.5 was obtained.

#### Example 2

[Preparation of benzene-insoluble organoaluminum compound]

A 400 ml glass flask thoroughly purged with nitrogen was charged with 134 ml of toluene and 10.9 g of  $\text{Al}_2(\text{SO}_4)_3 \cdot 14\text{H}_2\text{O}$  classified by a 32-mesh screen and left on the screen, and the contents of the flask were brought to a state of suspension. Thereto was added at room temperature 100 ml of a solution of aluminoxane prepared in the same manner as in Example 1 in toluene (2.34 moles-Al/l). Successively, the temperature of the flask was elevated to  $80^{\circ}\text{C}$  and stirred at that temperature for 7 hours. Thereafter, the formed aluminum sulfate compound present in the reaction mixture was removed in a nitrogen atmosphere by means of a 80-mesh screen, and the remaining reaction mixture was subjected to solid-liquid separation by filtration to obtain a benzene-insoluble organoaluminum oxy-compound. A concentration of aluminum dissolved in the filtrate was measured, whereby the aluminum concentration was less than the detection limit of 5 mg-Al/l.

A solubility of the thus obtained organoaluminum oxy-compound in benzene kept at  $60^{\circ}\text{C}$  as measured in the same manner as in Example 1 was 0.3%.

Furthermore, a ( $D_{1260}/D_{1220}$ ) ratio of an absorbance ( $D_{1260}$ ) at  $1260\text{ cm}^{-1}$  to an absorbance ( $D_{1220}$ ) at  $1220\text{ cm}^{-1}$  was 0.067.



[Polymerization]

The polymerization of Example 1 was repeated except that the benzene-insoluble organoaluminum oxy-compound as prepared above was used, whereby 10.8 g of an ethylene/4-methyl-1-pentene copolymer  
5 having an intrinsic viscosity [ $\eta$ ] of 0.49 dl/g, a density of 0.907 g/cm<sup>3</sup> and  $\overline{M}_w/\overline{M}_n$  of 2.6 was obtained.

Example 3

[Preparation of benzene-insoluble organoaluminum oxy-compound]

10

A 400 ml glass flask thoroughly purged with nitrogen was charged with 32.8 ml of toluene and 0.78 g of ground magnesium chloride hexahydrate, and the contents of the flask were slurried. Thereto was added at room temperature 25 ml of a solution of the aluminoxane prepared in Example 1 in toluene (2.31 mole-Al/l). Thereafter, the temperature of the flask was elevated to 80 °C and stirred at that temperature for 7 hours.  
15 After the 7-hour stirring, the reaction mixture was subjected to solid-liquid separation by filtration to obtain a benzene-insoluble organoaluminum oxy-compound. A concentration of aluminum dissolved in the filtrate was measured, whereby the measured aluminum concentration was less than the detection limit (5 mg-Al/l).

A solubility of the thus obtained organoaluminum oxy-compound in benzene kept at 60 °C as measured in the same manner as in Example 1 was 0.3%.

20

[Polymerization]

The polymerization of Example 1 was repeated except that there was used the benzene-insoluble organoaluminum oxy-compound as prepared above, whereby 11.3g of an ethylene/4-methyl-1-pentene  
25 copolymer having an intrinsic viscosity [ $\eta$ ] of 0.46 dl/g, a density of 0.907 g/cm<sup>3</sup> and  $\overline{M}_w/\overline{M}_n$  of 2.5 was obtained.

Examples 4-6

30 The polymerization of Example 1 was repeated except that each of transition metal compounds as shown in Table 1 was used.

35

40

45

50

55

Results obtained are shown in Table 1.

Table 1

Example	Transition metal compound		Yield of polymer (g)	[ $\eta$ ] (dl/g)	Density (g/cm <sup>3</sup> )	$\bar{M}_w / \bar{M}_n$
	Kind	(mmole)				
3	(MeCp) <sub>2</sub> ZrCl <sub>2</sub>	0.001	11.3	0.46	0.907	2.5
4	Cp <sub>2</sub> ZrCl <sub>2</sub>	0.001	6.5	0.40	0.912	2.6
5	Cp <sub>2</sub> ZrMe <sub>2</sub>	0.001	4.8	0.41	0.913	2.5
6	(Ind) <sub>2</sub> ZrCl <sub>2</sub>	0.001	12.8	0.52	0.906	2.4

Cp: Cyclopentadienyl group

Ind: Indenyl group

MeCp: Methylcyclopentadienyl group

Me: Methyl group

5

10

15

20

25

30

35

40

45

50

55

Example 7

[polymerization]

5 A 2 liter stainless steel autoclave thoroughly purged with nitrogen was charged with 900 ml of 4-methyl-1-pentene, followed by rise in temperature up to 130 °C. Into the autoclave were injected 1.14 ml of a suspension of the benzene-insoluble organoaluminum oxy-compound prepared in Example 1 in toluene (0.44 mole-Al/l) and 2 ml of a solution of ethylenebis(indenyl)zirconium dichloride in toluene (0.0005 mole-Zr/l) to initiate polymerization. The polymerization was carried out at the total pressure of 20 kg/cm<sup>2</sup>-G and  
 10 130 °C for 30 minutes while continuously feeding ethylene thereto, whereby 26.1 g of an ethylene/4-methyl-1-pentene copolymer having an intrinsic viscosity [ $\eta$ ] of 0.48 dl/g as measured at 135 °C in decalin, a density of 0.895 g/cm<sup>3</sup> and  $\bar{M}_w/\bar{M}_n$  of 2.4 was obtained.

Comparative Example 2

15 The polymerization of Example 7 was repeated except that in place of the benzene-insoluble organoaluminum oxy-compound, there was used a solution of the aluminoxane prepared in Example 1 in toluene in an amount of 0.5 mg atom in terms of Al atom whereby 20.8 g of an ethylene/4-methyl-1-pentene copolymer having an intrinsic viscosity [ $\eta$ ] of 0.37 dl/g, a density of 0.897 g/cm<sup>3</sup> and  $\bar{M}_w/\bar{M}_n$  of 2.4 was  
 20 obtained.

Example 8

[Polymerization]

25 The polymerization of Example 7 was repeated except that there was used the benzene-insoluble organoaluminum oxy-compound prepared in Example 2, whereby 24.8 g of an ethylene/4-methyl-1-pentene copolymer having an intrinsic viscosity [ $\eta$ ] of 0.45 dl/g, a density of 0.893 g/cm<sup>3</sup> and  $\bar{M}_w/\bar{M}_n$  of 2.5 was obtained.

30

Example 9

[Polymerization]

35 The polymerization of Example 7 was repeated except that there was used the benzene-insoluble organoaluminum oxy-compound prepared in Example 3, whereby 25.6 g of an ethylene/4-methyl-1-pentene copolymer having an intrinsic viscosity [ $\eta$ ] of 0.46 dl/g, a density of 0.894 g/cm<sup>3</sup> and  $\bar{M}_w/\bar{M}_n$  of 2.3 was obtained.

Example 10

[polymerization]

45 A 2 liter stainless steel autoclave thoroughly purged with nitrogen was charged with 900 ml of 4-methyl-1-pentene, followed by rise in temperature up to 50 °C. To the autoclave were added 1 ml of a solution of triisobutylaluminum in toluene (1 mole-Al/l) and 0.22 ml of a suspension of the benzene-insoluble organoaluminum oxy-compound prepared in Example 1 in toluene (0.44 mole-Al/l). The temperature was further elevated up to 75 °C, and 1 ml of a solution of bis(methylcyclopentadienyl)zirconium dichloride in toluene (0.001 mole-Zr/l) was injected, together with ethylene, into the autoclave to initiate polymerization.  
 50 The polymerization was carried out at the total pressure of 8 kg/cm<sup>2</sup>-G and 80 °C for 40 minutes, whereby 85.8 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 1.03 g/10 min, a density of 0.884 g/cm<sup>3</sup> and  $\bar{M}_w/\bar{M}_n$  of 2.1 was obtained.

Comparative Example 3

55

The polymerization of Example 10 was repeated except that in place of the benzene-insoluble organoaluminum oxy-compound, there was used the aluminoxane prepared in Example 1 in an amount of 0.1 mg atom in terms of Al atom, whereby 40.9 g of an ethylene/4-methyl-1-pentene copolymer having

MFR of 0.82 g/10 min, a density of 0.887 g/cm<sup>3</sup> and  $\overline{M}_w / \overline{M}_n$  of 2.2 was obtained.

#### Comparative Example 4

5 The polymerization of Example 10 was repeated except that in place of the benzene-insoluble organoaluminum oxy-compound, there was used the aluminoxane prepared in Example 1 in an amount of 0.5 mg atom in terms of Al atom, and no triisobutylaluminum was used, whereby 50.1 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 9.55 g/10 min, a density of 0.890 g/cm<sup>3</sup> and  $\overline{M}_w / \overline{M}_n$  of 2.2 was obtained.

10

#### Example 11

[Polymerization]

15 A 500 ml glass autoclave thoroughly purged with nitrogen was charged with 350 ml of toluene and 25 ml of 1-octene, followed by rise in temperature up to 65 °C. Thereafter, ethylene gas was passed through the autoclave at a rate of 120 l/hr, and thereto were added 0.5 mmole of triisobutylaluminum, 0.2 mg atom-Al of the benzene-insoluble organoaluminum oxy-compound prepared in Example 2 and 0.002 mmole of bis(cyclopentadienyl)zirconium dichloride in that order to initiate polymerization. The polymerization was  
20 carried out at ordinary pressure and 70 °C for 30 minutes while continuously feeding ethylene gas thereto, whereby 14.9 g of an ethylene/1-octene copolymer having MFR of 3.90 g/10 min, a density of 0.902 g/cm<sup>3</sup> and  $\overline{M}_w / \overline{M}_n$  of 2.4 was obtained.

#### Example 12

25

[Polymerization]

The polymerization of Example 7 was repeated except that there was used the benzene-insoluble organoaluminum oxy-compound prepared in Example 3, whereby 90.4g of an ethylene/4-methyl-1-pentene  
30 copolymer having MFR of 1.68 g/10 min, a density of 0.887 g/cm<sup>3</sup> and  $\overline{M}_w / \overline{M}_n$  of 2.1 was obtained.

#### Examples 13-17

The polymerization of Example 12 was repeated except that each of transition metal compounds and  
35 organoaluminum compounds respectively shown in Table 2 was used.

40

45

50

55

Results obtained are shown in Table 2.

Table 2

Example	Transition metal compound		Organoaluminum compound	
	Kind	(mmole)	Kind	(mmole)
12	(MeCp) <sub>2</sub> ZrCl <sub>2</sub>	0.001	Tri-isobutyl aluminum	1
13	Cp <sub>2</sub> ZrCl <sub>2</sub>	0.001	Tri-isobutyl aluminum	1
14	Cp <sub>2</sub> ZrMe <sub>2</sub>	0.001	Tri-isobutyl aluminum	1
15	(Ind) <sub>2</sub> ZrCl <sub>2</sub>	0.001	Tri-isobutyl aluminum	1
16	(MeCp) <sub>2</sub> ZrCl <sub>2</sub>	0.001	Tri-isobutyl aluminum	0.25
17	(MeCp) <sub>2</sub> ZrCl <sub>2</sub>	0.001	Tri-2-ethylhexyl aluminum	1

Table 2(continued)

Example	Yield of polymer (g)	MFR (g/10 min)	Density (g/cm <sup>3</sup> )	$\bar{M}_w / \bar{M}_n$
12	90.4	1.68	0.887	2.1
13	60.3	4.95	0.895	2.2
14	57.3	5.11	0.894	2.3
15	83.1	1.05	0.888	2.2
16	88.5	2.02	0.888	2.1
17	85.7	1.50	0.889	2.3

Cp: Cyclopentadienyl group      MeCp: Methylcyclopentadienyl group

Ind: Indenyl group      Me: Methyl group

Example 18

45 [polymerization]

A 2 liter stainless steel autoclave thoroughly purged with nitrogen was charged with 900 ml of 4-methyl-1-pentene, followed by rise in temperature up to 50°C. To the autoclave were added 0.22 ml of a suspension of the benzene-insoluble organoaluminum oxy-compound prepared in Example 1 in toluene (0.44 mole-Al/l) and 1 ml of a solution of (i-Bu)<sub>2</sub>Al-O-Al(i-Bu)<sub>2</sub> (1 mole-Al/l). After elevating the temperature to 75°C, 1 ml of a solution of bis(methylcyclopentadienyl)zirconium dichloride in toluene (0.001 mole-Zr/l) was injected, together with ethylene, into the autoclave to initiate polymerization. The polymerization was carried out at the total pressure of 8 kg/cm<sup>2</sup>-G and 80°C for 40 minutes while continuously feeding ethylene thereto, whereby 83.9 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 0.93 g/10 min, a density of 0.883 g/cm<sup>3</sup> and  $\bar{M}_w / \bar{M}_n$  of 2.2 was obtained.

Comparative Example 5

The polymerization of Example 18 was repeated except that in place of the benzene-insoluble organoaluminum oxy-compound, there was used the aluminoxane prepared in Example 1 in an amount of 0.1 mg atom in terms of Al atom, whereby 43.2 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 0.78 g/10 min, a density of 0.888 g/cm<sup>3</sup> and  $\overline{M}_w / \overline{M}_n$  of 2.2 was obtained.

Comparative Example 6

The polymerization of Example 18 was repeated except that in place of the benzene-insoluble organoaluminum oxy-compound, there was used the aluminoxane prepared in Example 1 in an amount of 0.5 mg atom in terms of Al atom, and no (i-Bu)<sub>2</sub>Al-O-Al(i-Bu)<sub>2</sub> was used, whereby 50.1 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 9.55 g/10 min, a density of 0.890 g/cm<sup>3</sup> and  $\overline{M}_w / \overline{M}_n$  of 2.2 was obtained.

Example 19

## [Polymerization]

A 500 ml glass autoclave thoroughly purged with nitrogen was charged with 350 ml of toluene and 25 ml of 1-octene, followed by rise in temperature up to 65 °C. Thereafter, ethylene gas was passed through the autoclave at a rate of 120 l/hr, and thereto were added 0.5 mmole of (i-Bu)<sub>2</sub>AlOMe, 0.2 mg atom-Al of the benzene-insoluble organoaluminum oxy-compound prepared in Example 2 and 0.002 mmole of bis-(cyclopentadienyl)zirconium dichloride in that order to initiate polymerization. The polymerization was carried out at ordinary pressure and 70 °C for 30 minutes while continuously feeding ethylene gas thereto, whereby 11.5 g of an ethylene/1-octene copolymer having MFR of 5.12 g/10 min, a density of 0.906 g/cm<sup>3</sup> and  $\overline{M}_w / \overline{M}_n$  of 2.3 was obtained.

Example 20

## [Polymerization]

The polymerization of Example 18 was repeated except that there was used the benzene-insoluble organoaluminum oxy-compound prepared in Example 3, whereby 95.4 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 1.51 g/10 min, a density of 0.885 g/cm<sup>3</sup> and  $\overline{M}_w / \overline{M}_n$  of 2.1 was obtained.

Examples 21-24

The polymerization of Example 20 was repeated except that each of transition metal compounds and organoaluminum compounds respectively shown in Table 3 was used.

Results obtained are shown in Table 3.

Table 3

Example	Transition metal compound		Yield of polymer (g)	MFR (g/10 min)	Density (g/cm <sup>3</sup> )	$\bar{M}_w / \bar{M}_n$
	Kind	(mmole)				
20	(MeCp) <sub>2</sub> ZrCl <sub>2</sub>	0.001	95.4	1.51	0.885	2.1
21	Cp <sub>2</sub> ZrCl <sub>2</sub>	0.001	62.5	5.55	0.893	2.1
22	Cp <sub>2</sub> ZrMe <sub>2</sub>	0.001	54.9	6.02	0.895	2.3
23	(Ind) <sub>2</sub> ZrCl <sub>2</sub>	0.001	85.2	0.96	0.887	2.2
24*	(MeCp) <sub>2</sub> ZrCl <sub>2</sub>	0.001	97.5	2.66	0.882	2.3

\* Amount of (i-Bu)<sub>2</sub> Al-O-Al (i-Bu)<sub>2</sub> used 0.25 mg atom-Al

Cp; Cyclopentadienyl group

MeCp; Methylcyclopentadienyl group

Ind; Indenyl group

Me; Methyl group



Example 25

[polymerization]

5 A 2 liter stainless steel autoclave thoroughly purged with nitrogen was charged with 600 ml of toluene and 300 ml of 4-methyl-1-pentene, followed by rise in temperature up to 50 °C. To the autoclave were added 0.11 ml of a suspension of the benzene-insoluble organoaluminum oxy-compound prepared in Example 1 in toluene (0.44 mole-Al/l) and 1 ml of a solution of triisobutylaluminum in toluene (1 mole-Al/l). After elevating further the temperature to 75 °C, 0.3 ml of a solution of ethylenebis(indenyl)zirconium dichloride in toluene (0.0005 mole-Zr/l) was injected, together with ethylene, into the autoclave to initiate polymerization. The polymerization was carried out at the total pressure of 8 kg/cm<sup>2</sup>-G and 80 °C for 40 minutes while continuously feeding ethylene thereto, whereby 98.9 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 14.0 g/10 min, a density of 0.898 g/cm<sup>3</sup> and  $\bar{M}_w/\bar{M}_n$  of 2.3 was obtained.

15 Comparative Example 7

The polymerization of Example 25 was repeated except that in place of the benzene-insoluble organoaluminum oxy-compound, there was used the aluminoxane prepared in Example 1 in an amount of 0.05 mg atom in terms of Al atom, whereby 55.1g of an ethylene/4-methyl-1-pentene copolymer having MFR of 9.73 g/10 min, a density of 0.905 g/cm<sup>3</sup> and  $\bar{M}_w/\bar{M}_n$  of 2.3 was obtained.

Comparative Example 8

25 The polymerization of Example 25 was repeated except that in place of the benzene-insoluble organoaluminum oxy-compound, there was used the aluminoxane prepared in Example 1 in an amount of 0.5 mg atom in terms of Al atom, and no triisobutylaluminum was used, whereby 62.8 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 35.6 g/10 min, a density of 0.897 g/cm<sup>3</sup> and  $\bar{M}_w/\bar{M}_n$  of 2.2 was obtained.

30 Example 26

[Polymerization]

35 A 500 ml glass autoclave thoroughly purged with nitrogen was charged with 250 ml of toluene and elevated in temperature up to 65 °C while passing therethrough propylene gas. Thereafter, 0.5 mmole of triisobutylaluminum, 0.5 mg atom in terms of aluminum atom of the benzene-insoluble organoaluminum oxy-compound prepared in Example 2 and 0.005 mmole of ethylenebis(indenyl)zirconium dichloride were successively added to the autoclave to initiate polymerization. The polymerization was carried out at ordinary pressure and 70 °C for 1 hour while continuously feeding propylene gas thereto, whereby 16.9 g of isotactic polypropylene having an intrinsic viscosity [ $\eta$ ] of 0.28 dl/g as measured at 135 °C in decalin and  $\bar{M}_w/\bar{M}_n$  of 1.9 was obtained.

Comparative Example 9

45 The polymerization of Example 26 was repeated except that in place of the benzene-insoluble organoaluminum oxy-compound, there was used a solution of the aluminoxane prepared in Example 1 in toluene in an amount of 2.5 mg atom in terms of aluminum atom, and no triisobutylaluminum was used, whereby 12.0 g of isotactic polypropylene having an intrinsic viscosity [ $\eta$ ] of 0.14 dl/g and  $\bar{M}_w/\bar{M}_n$  of 1.9 was obtained.

50 Example 27

[Polymerization]

55 The polymerization of Example 25 was repeated except that the amount of triisobutylaluminum used was changed to 0.25 mmole, and the benzene-insoluble organoaluminum oxy-compound prepared in Example 3 was used in an amount of 0.05 mg atom in terms of aluminum atom, whereby 93.3g of an ethylene/4-methyl-1-pentene copolymer having MFR of 11.5 g/10 min, a density of 0.900 g/cm<sup>3</sup> and  $\bar{M}_w/\bar{M}_n$  of 2.3 was obtained.

$\bar{M}_n$  of 2.3 was obtained.

#### Example 28

5 The polymerization of Example 27 was repeated except that in place of the 4-methyl-1-pentene, 1-octene was used, and the amount of the ethylenebis(indenyl)zirconium dichloride and triisobutylaluminum used were changed to  $7 \times 10^{-8}$  mole and 1 mmole, respectively, whereby 70.8 g of an ethylene/1-octene copolymer having MFR of 8.94 g/10 min, a density of 0.896 g/cm<sup>3</sup> and  $\bar{M}_w/\bar{M}_n$  of 2.2 was obtained.

#### 10 Example 29

The polymerization of Example 27 was repeated except that in place of the triisobutylaluminum, 0.5 mmole of tri-2-ethylhexylaluminum was used, whereby 90.5 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 12.1 g/10 min, a density of 0.900 g/cm<sup>3</sup> and  $\bar{M}_w/\bar{M}_n$  of 2.4 was obtained.

15

#### Example 30

[polymerization]

20 A 2 liter stainless steel autoclave thoroughly purged with nitrogen was charged with 600 ml of toluene and 300 ml of 4-methyl-1-pentene, followed by rise in temperature up to 50 °C. To the autoclave were added 0.11 ml of a suspension of the benzene-insoluble organoaluminum oxy-compound prepared in Example 1 in toluene (0.44 mole-Al/l) and 1 ml of a solution of (i-Bu)<sub>2</sub>Al-O-Al(i-Bu)<sub>2</sub> in toluene (1 mole-Al/l). After elevating the temperature to 75 °C, 0.3 ml of a solution of ethylenebis(indenyl)zirconium dichloride in toluene (0.0005 mole-Zr/l) was injected, together with ethylene, into the autoclave to initiate polymerization.  
25 The polymerization was carried out at the total pressure of 8 kg/cm<sup>2</sup>-G and 80 °C for 40 minutes while continuously feeding ethylene thereto, whereby 101.2 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 14.6 g/10 min, a density of 0.899 g/cm<sup>3</sup> and  $\bar{M}_w/\bar{M}_n$  of 2.2 was obtained.

#### 30 Comparative Example 10

The polymerization of Example 30 was repeated except that in place of the benzene-insoluble organoaluminum oxy-compound, there was used the aluminosilane prepared in Example 1 in an amount of 0.05 mg atom in terms of Al atom, whereby 53.9 g of an ethylene/4-methyl-1-pentene copolymer having  
35 MFR of 10.6 g/10 min, a density of 0.904 g/cm<sup>3</sup> and  $\bar{M}_w/\bar{M}_n$  of 2.3 was obtained.

#### Comparative Example 11

40 The polymerization of Example 30 was repeated except that in place of the benzene-insoluble organoaluminum oxy-compound, there was used a solution of the aluminosilane prepared in Example 1 in toluene in an amount of 0.5 mg atom in terms of Al atom, and no (i-Bu)<sub>2</sub>Al-O-Al(i-Bu)<sub>2</sub> was used, whereby 62.8 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 35.6 g/10 min, a density of 0.897 g/cm<sup>3</sup> and  $\bar{M}_w/\bar{M}_n$  of 2.2 was obtained.

#### 45 Example 31

[Polymerization]

50 A 500 ml glass autoclave thoroughly purged with nitrogen was charged with 250 ml of toluene, followed by rise in temperature up to 65 °C while passing propylene gas therethrough. Thereafter, 0.5 mg atom in terms of aluminum atom of (i-Bu)<sub>2</sub>Al-O-Al(i-Bu)<sub>2</sub>, 0.5 mg atom in terms of aluminum atom of the benzene-insoluble organoaluminum oxy-compound prepared in Example 2 and 0.005 mmole of ethylenebis(indenyl)zirconium dichloride were successively added to the autoclave to initiate polymerization. The polymerization was carried out at ordinary pressure and 70 °C for 1 hour while continuously feeding propylene gas thereto,  
55 whereby 17.5 g of isotactic polypropylene having an intrinsic viscosity [ $\eta$ ] of 0.30 dl/g as measured at 135 °C in decalin and  $\bar{M}_w/\bar{M}_n$  of 2.0 was obtained.

Comparative Example 12

The polymerization of Example 31 was repeated except that in place of the benzene-insoluble organoaluminum oxy-compound, there was used 2.5 mg atom in terms of aluminum atom of the aluminoxane prepared in Example 1, and no  $(i\text{-Bu})_2\text{Al-O-Al}(i\text{-Bu})_2$  was used, whereby 12.0 g of isotactic polypropylene having an intrinsic viscosity  $[\eta]$  of 0.14 dl/g and  $\overline{M}_w/\overline{M}_n$  of 1.9 was obtained.

Example 32

[Polymerization]

The polymerization of Example 30 was repeated except that the amount of  $(i\text{-Bu})_2\text{Al-O-Al}(i\text{-Bu})_2$  used was changed to 0.25 mg atom in terms of aluminum atom and the amount of the benzene-insoluble organoaluminum oxy-compound prepared in Example 3 used was changed to 0.05 mg atom in terms of aluminum atom, whereby 95.6 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 10.0 g/10 min, a density of 0.899 g/cm<sup>3</sup> and  $\overline{M}_w/\overline{M}_n$  of 2.2 was obtained.

Example 33

The polymerization of Example 32 was repeated except that in place of the 4-methyl-1-pentene, there was used 1-octene, and the amounts of ethylenebis(indenyl)zirconium dichloride and  $(i\text{-Bu})_2\text{Al-O-Al}(i\text{-Bu})_2$  used were  $7 \times 10^{-8}$  mole and 1 mg atom in terms of aluminum atom, respectively, whereby 78.1 g of an ethylene/1-octene copolymer having MFR of 9.22 g/10 min, a density of 0.894 g/cm<sup>3</sup> and  $\overline{M}_w/\overline{M}_n$  of 2.2 was obtained.


Example 34

The polymerization of Example 32 was repeated except that in place of the  $(i\text{-Bu})_2\text{Al-O-Al}(i\text{-Bu})_2$  there was used 2.0 mmoles of  $(i\text{-Bu})_2\text{AlOMe}$ , whereby 71.6 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 18.0 g/10 min, a density of 0.902 g/cm<sup>3</sup> and  $\overline{M}_w/\overline{M}_n$  of 2.3 was obtained.

Example 35

[Polymerization]

A 2 liter stainless steel autoclave thoroughly purged with nitrogen was charged with 900 ml of 4-methyl-1-pentene, followed by rise in temperature up to 50°C. To the autoclave were added 0.22 ml of a suspension of the benzene-insoluble organoaluminum oxy-compound prepared in Example 1 in toluene (0.44 mole-Al/l) and 1 ml of a solution of an aluminoxane having at least one hydrocarbon group other than n-alkyl group bonded to the aluminum atom, i.e.



in toluene (1 mole-Al/l). After elevating the temperature to 75°C, 1 ml of a solution of bis(methylcyclopentadienyl)zirconium dichloride in toluene (0.001 mole-Zr/l) was injected, together with ethylene, into the autoclave to initiate polymerization. The polymerization was carried out at the total pressure of 8 kg/cm<sup>2</sup>-G and 80°C for 40 minutes while continuously feeding ethylene thereto, whereby 82.6 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 1.10 g/10 min, a density of 0.887 g/cm<sup>3</sup> and  $\overline{M}_w/\overline{M}_n$  of 2.3 was obtained.


Comparative Example 13

The polymerization of Example 35 was repeated except that in place of the benzene-insoluble organoaluminum oxy-compound, there was used 0.1 mg atom in terms of Al atom of the aluminoxane prepared in Example 1, whereby 41.0 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 0.85

g/10 min, a density of 0.891 g/cm<sup>3</sup> and  $\overline{M}_w / \overline{M}_n$  of 2.2 was obtained.

#### Comparative Example 14

5 The polymerization of Example 35 was repeated except that in place of the benzene-insoluble organoaluminum oxy-compound, there was used 0.5 mg atom in terms of Al atom of the aluminoxane prepared in Example 1, and no




15 was used, whereby 50.1 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 9.55 g/10 min, a density of 0.890 g/cm<sup>3</sup> and  $\overline{M}_w / \overline{M}_n$  of 2.2 was obtained.

#### Example 36

20 [Polymerization]

A 500 ml glass autoclave thoroughly purged with nitrogen was charged with 350 ml of toluene and 25 ml of 1-octene, followed by rise in temperature up to 65 °C. Thereafter, ethylene gas was passed at a rate of 120 l/hr therethrough, and 0.5 mg atom-Al of



0.2 mg atom-Al of the benzene-insoluble organoaluminum oxy-compound prepared in Example 2 and 0.002 mmole of bis(cyclopentadienyl)zirconium dichloride were successively added to the autoclave to initiate polymerization. The polymerization was carried out at 70 °C for 30 minutes while continuously feeding ethylene gas thereto, whereby 13.5 g of an ethylene/1-octene copolymer having MFR of 4.20 g/10 min, a density of 0.904 g/cm<sup>3</sup> and  $\overline{M}_w / \overline{M}_n$  of 2.3 was obtained.

35

#### Example 37

40 [Polymerization]

The polymerization of Example 35 was repeated except that there was used the benzene-insoluble organoaluminum oxy-compound prepared in Example 3, whereby 82.3 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 1.05 g/10 min, a density of 0.888 g/cm<sup>3</sup> and  $\overline{M}_w / \overline{M}_n$  of 2.3 was obtained.

45

#### Examples 38-42

The polymerization of Example 35 was repeated except that each of transition metal compounds and organoaluminum compounds respectively shown in Table 4 was used to obtain results as shown in Table 4.

50

55

Table 4

Example	Transition metal compound		Yield of polymer (g)	MFR (g/10 min)	Density (g/cm <sup>3</sup> )	$\bar{M}_w / \bar{M}_n$
	Kind	(mmole)				
37	(MeCp) <sub>2</sub> ZrCl <sub>2</sub>	0.001	82.3	1.05	0.888	2.3
38	Cp <sub>2</sub> ZrCl <sub>2</sub>	0.001	60.1	4.78	0.895	2.2
39	Cp <sub>2</sub> ZrMe <sub>2</sub>	0.001	49.5	6.20	0.897	2.4
40	(Ind) <sub>2</sub> ZrCl <sub>2</sub>	0.001	79.1	1.87	0.888	2.3
41*	(MeCp) <sub>2</sub> ZrCl <sub>2</sub>	0.001	80.6	1.50	0.887	2.2
42**	(MeCp) <sub>2</sub> ZrCl <sub>2</sub>	0.001	76.4	2.10	0.887	2.4


\* (i-Bu)<sub>2</sub> Al-(O-Al)<sub>2</sub>-Al(i-Bu)<sub>2</sub> 0.50 mg atom-Al used.

\*\* Isobutyl aluminoxane (molecular weight of 1090 measured by cryoscopic method)  
1.0 mg atom-Al used.

Example 43

[Polymerization]

5 A 2 liter stainless steel autoclave thoroughly purged with nitrogen was charged with 600 ml of toluene and 300 ml of 4-methyl-1-pentene, followed by rise in temperature up to 50°C. To the autoclave were added 0.11 ml of a suspension of the benzene-insoluble organoaluminum oxy-compound prepared in Example 1 in toluene (0.44 mole-Al/l) and 1 ml of a solution of an aluminoxane having at least one hydrocarbon group other than n-alkyl group bonded to the aluminum atom,  
 10 i.e.



15

in toluene (1 mole-Al/l).

After elevating the temperature to 75°C, 0.3 ml of a solution of ethylenebis(indenyl)zirconium dichloride in toluene (0.0005 mole-Zr/l) was injected, together with ethylene, into the autoclave to initiate polymerization.  
 20 The polymerization was carried out at the total pressure of 8 kg/cm<sup>2</sup>-G and 80°C for 40 minutes while continuously feeding ethylene thereto, whereby 89.5 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 9.08 g/10 min, a density of 0.900 g/cm<sup>3</sup> and  $\overline{M}_w/\overline{M}_n$  of 2.4 was obtained.

Comparative Example 15


25

The polymerization of Example 43 was repeated except that in place of the benzene-insoluble organoaluminum oxy-compound, there was used 0.05 mg atom in terms of Al atom of the aluminoxane prepared in Example 1, whereby 50.2 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 7.55 g/10 min, a density of 0.905 g/cm<sup>3</sup> and  $\overline{M}_w/\overline{M}_n$  of 2.3 was obtained.

30

Comparative Example 16

The polymerization of Example 43 was repeated except that in place of the benzene-insoluble organoaluminum oxy-compound, there was used 0.5 mg atom in terms of Al atom of the aluminoxane prepared in Example 1, and no  
 35



40

was used, whereby 62.8 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 35.6 g/10 min, a density of 0.897 g/cm<sup>3</sup> and  $\overline{M}_w/\overline{M}_n$  of 2.2 was obtained.


45

Example 44

[Polymerization]

50 A 500 ml glass autoclave thoroughly purged with nitrogen was charged with 250 ml of toluene and elevated in temperature up to 65°C while passing propylene gas therethrough. Thereafter, 0.5 mg atom-Al in terms of aluminum atom of,


55



0.5 mg atom in terms of aluminum atom of the benzene-insoluble organoaluminum oxy-compound prepared in Example 2 and 0.005 mmole of ethylenebis(indenyl)zirconium dichloride were successively added to the autoclave to initiate polymerization. The polymerization was carried out at 70 °C for 1 hour while continuously feeding propylene gas thereto, whereby 15.7 g of isotactic polypropylene having an intrinsic viscosity  
5 [\*] of 0.27 dl/g as measured at 135 °C in decalin and  $\overline{M}_w / \overline{M}_n$  of 1.9 was obtained.

#### Comparative Example 17

The polymerization of Example 44 was repeated except that in place of the benzene-insoluble  
10 organoaluminum oxy-compound, there was used 2.5 mg atom in terms of aluminum atom of the aluminoxane prepared in Example 1, and no




was used, whereby 12.0 g of isotactic polypropylene having an intrinsic viscosity [\*] of 0.14 dl/g and  $\overline{M}_w / \overline{M}_n$  of 1.9 was obtained.  
20

#### Example 45

[Polymerization]


25 The polymerization of Example 43 was repeated except that the amount of



used was changed to 0.5 mg atom-Al, and there was used 0.05 mg atom-Al of the benzene-insoluble organoaluminum oxy-compound prepared in Example 3, whereby 88.2 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 12.2 g/10 min, a density of 0.901 g/cm<sup>3</sup> and  $\overline{M}_w / \overline{M}_n$  of 2.3 was obtained.  
35

#### Example 46


The polymerization of Example 45 was repeated except that in place of the 4-methyl-1-pentene, there was used 1-octene, and  $7 \times 10^{-8}$  mole of ethylenebis(indenyl)zirconium dichloride and 1 mg atom-Al of  
40



was used, whereby 74.4 g of an ethylene/1-octene copolymer having MFR of 10.3 g/10 min, a density of 0.895 g/cm<sup>3</sup> and  $\overline{M}_w / \overline{M}_n$  of 2.3 was obtained.  
45

#### Example 47

50 The polymerization of Example 45 was repeated except that in place of the




there was used 1.0 mg atom-Al of isobutylaluminumoxane (molecular weight 1090 measured by cryoscopic method), whereby 84.2 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 12.5 g/10 min, a density of 0.899 g/cm<sup>3</sup> and  $\overline{M}_w / \overline{M}_n$  of 2.4 was obtained.

5 Example 48

[Polymerization]

10 A 2 liter stainless steel autoclave thoroughly purged with nitrogen was charged with 900 ml of 4-methyl-1-pentene, followed by rise in temperature up to 50°C. To the autoclave were added 0.22 ml of a suspension of the benzene-insoluble organoaluminum oxy-compound prepared in Example 1 in toluene (0.44 mole-Al/l), 0.5 ml of a solution of an aluminumoxane having at least one hydrocarbon group other than n-alkyl group bonded to the aluminum atom, i.e.

15



20

in toluene (1 mole-Al/l) and 0.5 ml of a solution of triisobutyl aluminum in toluene (1 mole-Al/l). After elevating the temperature to 75°C, 1 ml of a solution of bis(methylcyclopentadienyl) zirconium dichloride in toluene (0.001 mole-Zr/l) was injected, together with ethylene, into the autoclave to initiate polymerization. 25 The polymerization was carried out at the total pressure of 8 kg/cm<sup>2</sup>-G and 80°C for 40 minutes while continuously feeding ethylene thereto, whereby 84.0 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 0.95 g/10 min, a density of 0.886 g/cm<sup>3</sup> and  $\overline{M}_w / \overline{M}_n$  of 2.3 was obtained.

Comparative Example 18

30


The polymerization of Example 48 was repeated except that in place of the benzene-insoluble organoaluminum oxy-compound, there was used 0.1 mg atom in terms of Al atom of the aluminumoxane prepared in Example 1, whereby 42.1 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 0.88 g/10 min, a density of 0.890 g/cm<sup>3</sup> and  $\overline{M}_w / \overline{M}_n$  of 2.3 was obtained.

35

Comparative Example 19

40 The polymerization of Example 48 was repeated except that in place of the benzene-insoluble organoaluminum oxy-compound, there was used 0.5 mg atom in terms of Al atom of the aluminumoxane prepared in Example 1, and no

45



and triisobutyl aluminum were used, whereby 50.1 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 9.55 g/10 min, a density of 0.890 g/cm<sup>3</sup> and  $\overline{M}_w / \overline{M}_n$  of 2.2 was obtained.


50

Example 49

[Polymerization]

55 A 500 ml glass autoclave thoroughly purged with nitrogen was charged with 350 ml of toluene and 25 ml of 1-octene and elevated in temperature up to 65°C. Thereafter, while passing ethylene gas therethrough, 0.4 mg atom-Al in terms of aluminum atom of,





5 0.1 mg atom in terms of aluminum atom of (i-Bu)<sub>2</sub>AlOMe, 0.2 mg atom in terms of aluminum atom of the benzene-insoluble organoaluminum oxy-compound prepared in Example 2 and 0.002 mmole of bis-(cyclopentadienyl)zirconium dichloride were successively added to the autoclave to initiate polymerization. The polymerization was carried out at 70 °C for 30 minutes while continuously feeding ethylene gas thereto, whereby 11.6 g of ethylene/1-octene copolymer having MFR of 4.56 g/10 min, a density of 0.904 g/cm<sup>3</sup> and  $\overline{M}_w/\overline{M}_n$  of 2.3 was obtained.

#### Example 50


15 [Polymerization]

The polymerization of Example 48 was repeated except that in place of the benzene-insoluble organoaluminum oxy-compound prepared in Example 1, there was used 0.05 mg atom-Al of the benzene-insoluble organoaluminum oxy-compound prepared in Example 3, whereby 80.8 g of an ethylene/4-methyl-20 1-pentene copolymer having MFR of 1.13 g/10 min, a density of 0.887 g/cm<sup>3</sup> and  $\overline{M}_w/\overline{M}_n$  of 2.2 was obtained.

#### Example 51

25 [Polymerization]

A 2 liter stainless steel autoclave thoroughly purged with nitrogen was charged with 600 ml of toluene and 300 ml of 4-methyl-1-pentene, followed by rise in temperature up to 50 °C. To the autoclave were added 0.11 ml of a suspension of the benzene-insoluble organoaluminum oxy-compound prepared in 30 Example 1 in toluene (0.44 mole-Al/l), 0.5 ml of a solution of triisobutyl aluminum in toluene (1 mole-Al/l) and 0.5 ml of a solution of an aluminoxane having at least one hydrocarbon group other than n-alkyl group bonded to the aluminum atom, i.e.




40 in toluene (1 mole-Al/l). After elevating the temperature to 75 °C, 0.3 ml of a solution of ethylenebis(indenyl)zirconium dichloride in toluene (0.0005 mole-Zr/l) was injected, together with ethylene, into the autoclave to initiate polymerization. The polymerization was carried out at the total pressure of 8 kg/cm<sup>2</sup>-G and 80 °C for 40 minutes while continuously feeding ethylene thereto, whereby 95.5 g of an ethylene/4-methyl-1-pentene copolymer having 45 MFR of 15.2 g/10 min, a density of 0.899 g/cm<sup>3</sup> and  $\overline{M}_w/\overline{M}_n$  of 2.3 was obtained.

#### Comparative Example 20

50 The polymerization of Example 51 was repeated except that in place of the benzene-insoluble organoaluminum oxy-compound, there was used 0.05 mg atom in terms of Al atom of the aluminoxane prepared in Example 1, whereby 53.9 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 10.2 g/10 min, a density of 0.906 g/cm<sup>3</sup> and  $\overline{M}_w/\overline{M}_n$  of 2.4 was obtained.

#### Comparative Example 21

55 The polymerization of Example 51 was repeated except that in place of the benzene-insoluble organoaluminum oxy-compound, there was used 0.5 mg atom in terms of Al atom of the aluminoxane prepared in Example 1, and no triisobutyl aluminum and




5

were used, whereby 62.8 g of an ethylene/4-methyl-1-pentene copolymer having MFR of 35.6 g/10 min, a density of 0.897 g/cm<sup>3</sup> and  $\overline{M}_w/\overline{M}_n$  of 2.2 was obtained.

10 Example 52

[Polymerization]

A 500 ml glass autoclave thoroughly purged with nitrogen was charged with 250 ml of toluene and  
15 elevated in temperature up to 65 °C while passing propylene gas therethrough. Thereafter, 0.2 mg atom-Al in terms of aluminum atom of,




20

0.3 mg atom-Al in terms of aluminum atom of (i-Bu)<sub>2</sub>Al-O-Al(i-Bu)<sub>2</sub> and 0.5 mg atom in terms of aluminum atom of the benzene-insoluble organoaluminum oxy-compound prepared in Example 2 and 0.005 mmole of ethylenebis(indenyl)zirconium dichloride were successively added to the autoclave to initiate polymerization.  
25 The polymerization was carried out at 70 °C for 1 hour while continuously feeding propylene gas thereto, whereby 16.2 g of isotactic polypropylene having an intrinsic viscosity [η] of 0.29 dl/g as measured at 135 °C in decalin and  $\overline{M}_w/\overline{M}_n$  of 2.1 was obtained.

30 Comparative Example 22

The polymerization of Example 52 was repeated except that in place of the benzene-insoluble organoaluminum oxy-compound, there was used 2.5 mg atom in terms of aluminum atom of the aluminoxane prepared in Example 1, and no  
35




40

and (i-Bu)<sub>2</sub>Al-O-Al(i-Bu)<sub>2</sub> were used, whereby 12.0 g of isotactic polypropylene having an intrinsic viscosity [η] of 0.14 dl/g and  $\overline{M}_w/\overline{M}_n$  of 1.9 was obtained.

45 **Claims**

1. An olefin polymerization catalyst component comprising an organoaluminum oxy-compound having
  - (a) less than 10% in terms of Al atom of an Al component dissolving in benzene kept at 60 °C, wherein the solubility in benzene of the organoaluminum oxy-compound is determined by suspending  
50 said organoaluminum oxy-compound in 100 ml of benzene in an amount corresponding to 100 mg atoms in terms of Al atom, mixing the resulting suspension at 60 °C for 6 hours, filtering the resulting mixture using a G.5 glass filter equipped with a jacket kept at 60 °C, and washing the solids portion separated on the filter four times with 50 ml of benzene at 60 °C to measure the amount of Al atoms present in the whole filtrate; and
  - (b) a ratio ( $D_{1260}/D_{1220}$ ) of an absorbance ( $D_{1260}$ ) at 1260 cm<sup>-1</sup> to an absorbance ( $D_{1220}$ ) at 1220cm<sup>-1</sup>, both obtained by infrared spectrophotometry, of less than 0.09/1.  
55

2. A catalyst component according to claim 1 wherein (a) less than 2% in terms of Al atoms of the Al component dissolves in benzene kept at 60 °C.
3. A catalyst component according to claim 1 or 2 wherein (b) the ratio (D<sub>1260</sub>/D<sub>1220</sub>) is from 0.04 to 0.07.
- 5 4. An olefin polymerization catalyst comprising  
 [A] an organoaluminum oxy-compound as claimed in claim 1, 2 or 3 and  
 [B] a transition metal compound containing a ligand having a cycloalkadienyl skeleton.
- 10 5. A catalyst according to claim 4 wherein the transition metal compound [B] is a transition metal compound containing at least two ligands having a cycloalkadienyl skeleton, said ligands being bonded together through lower alkylene groups.
6. A catalyst according to claim 4 or 5 further comprising  
 15 [C] an organoaluminum compound.
7. A catalyst according to claim 6 wherein the organoaluminum compound [C] is an organoaluminum compound represented by the formula R<sup>6</sup><sub>m</sub>AlX<sub>3-m</sub> wherein R<sup>6</sup> is hydrocarbon of 1-12 carbon atoms, X is halogen and m is 1-3, or by the formula R<sup>6</sup><sub>n</sub>AlY<sub>3-n</sub> wherein R<sup>6</sup> is as defined above, Y is hydrogen,  
 20 -OR<sup>7</sup>, -OSiR<sup>8</sup><sub>3</sub>, -OAlR<sup>9</sup><sub>2</sub>,



25

-NR<sup>12</sup><sub>2</sub> or -SiR<sup>13</sup><sub>3</sub>, n is 1-2 and R<sup>7</sup>-R<sup>13</sup>, which may be the same or different, are each hydrogen, halogen or hydrocarbon.


- 30 8. A catalyst according to claim 4, 5 or 6 further comprising  
 [D] an aluminoxane having at least one hydrocarbon group other than n-alkyl group bonded to the aluminum atom.
9. A catalyst according to claim 8 wherein in [D] the hydrocarbon group other than n-alkyl group is  
 35 branched chain alkyl, cycloalkyl or aryl.
10. A process for preparing an olefin polymer which comprises polymerizing or copolymerizing olefins in the presence of an olefin polymerization catalyst as claimed in any one of claims 4 to 9.

40 **Patentansprüche**

1. Olefinpolymerisations-Katalysatorkomponente, umfassend eine Organoaluminium-Oxyverbindung mit  
 (a) weniger als 10 %, bezogen auf die Al-Atome, einer Al-Komponente, gelöst in auf 60 °C  
 gehaltenem Benzol, wobei die Löslichkeit der Organoaluminium-Oxyverbindung in Benzol durch  
 45 Suspendieren der Organoaluminium-Oxyverbindung in 100 ml Benzol in einer Menge, die 100  
 Milligrammatomen, bezogen auf die Al-Atome, entspricht, Mischen der resultierenden Suspension  
 bei 60 °C während 6 Stunden. Filtern der resultierenden Mischung unter Anwendung eines mit einer  
 Ummantelung ausgestatteten, auf 60 °C gehaltenen G5-Glasfilters und 4maliges Waschen des auf  
 dem Filter abgetrennten Feststoffteils mit 50 ml Benzol bei 60 °C bestimmt wird, um die Menge der  
 50 im gesamten Filtrat vorliegenden Al-Atome zu bestimmen;  
 und  
 (b) einem Verhältnis (D<sub>1260</sub>/D<sub>1220</sub>) der Absorption (D<sub>1260</sub>) bei 1260 cm<sup>-1</sup> zu einer Absorption  
 (D<sub>1220</sub>) bei 1220 cm<sup>-1</sup>, beide durch IR-Spektrophotometrie erhalten, von weniger als 0,09/1.
- 55 2. Katalysatorkomponente gemäß Anspruch 1, wobei (a) weniger als 2 %, bezogen auf die Al-Atome, der Al-Komponente in auf 60 °C gehaltenem Benzol löst.

EP 0 363 029 B1

3. Katalysatorkomponente gemäß Anspruch 1 oder 2, worin (b), das Verhältnis ( $D_{1260}/D_{1220}$ ), von 0,04 bis 0,07 beträgt.
4. Olefinpolymerisationskatalysator, umfassend  
 5 [A] eine Organoaluminium-Oxyverbindung gemäß Anspruch 1, 2 oder 3 und  
 [B] eine Übergangsmetallverbindung, die einen Liganden mit einem Cycloalkadienyl-Gerüst enthält.
5. Katalysator gemäß Anspruch 4, worin die Übergangsmetallverbindung [B] eine Übergangsmetallverbindung ist, welche mindestens zwei Liganden mit einem Cycloalkadienyl-Gerüst enthält, wobei die  
 10 Liganden durch niedere Alkylgruppen miteinander verbunden sind.
6. Katalysator gemäß Anspruch 4 oder 5, umfassend ferner  
 [C] eine Organoaluminiumverbindung.
- 15 7. Katalysator gemäß Anspruch 6, worin die Organoaluminiumverbindung [C] eine Organoaluminiumverbindung der Formel  $R^6_mAlX_{3-m}$ , worin  $R^6$  ein Kohlenwasserstoff mit 1 - 12 Kohlenstoffatomen ist, X ein Halogen bedeutet und m für 1 - 3 steht, oder der Formel  $R^6_nAlY_{3-n}$  ist, worin  $R^6$  wie oben definiert ist, Y Wasserstoff,  $-OR^7$ ,  $-OSiR^8_3$ ,  $-OAlR^9_2$ ,



- 25  $-NR^{12}_2$  oder  $-SiR^{13}_3$  bedeutet, n für 1 - 2 steht und  $R^7 - R^{13}$ , welche gleich oder verschieden sein können, jeweils Wasserstoff, ein Halogen oder ein Kohlenwasserstoff ist.
8. Katalysator gemäß Anspruch 4, 5 oder 6, ferner umfassend  
 30 [D] ein Aluminoxan mit mindestens einer Kohlenwasserstoffgruppe außer einer n-Alkylgruppe, die am Aluminiumatom gebunden ist.
9. Katalysator gemäß Anspruch 8, worin in [D] die Kohlenwasserstoffgruppe, die keine n-Alkylgruppe ist, ein verzweigt-kettiges Alkyl, Cycloalkyl oder Aryl ist.
- 35 10. Verfahren zur Herstellung eines Olefinpolymeren, welches die Polymerisation oder Copolymerisation von Olefinen in Gegenwart eines Olefinpolymerisationskatalysators gemäß mindestens einem der Ansprüche 4 bis 9 umfaßt.

40 **Revendications**

1. Composant de catalyseur de polymérisation d'oléfines comprenant un composé oxy-organoaluminiumique ayant  
 45 (a) moins de 10 %, exprimé en atomes d'aluminium, d'un composant d'aluminium se dissolvant dans du benzène maintenu à 60 °C, dans lequel la solubilité du composé oxy-organoaluminiumique est déterminée en mettant en suspension ledit composé oxy-organoaluminiumique dans 100 ml de benzène, à raison de 100 mg d'atomes d'aluminium, en agitant la suspension résultante à 60 °C pendant 6 heures, en filtrant le mélange résultant, utilisant un filtre en verre G5 équipé d'une chemise maintenue à 60 °C, et en lavant 4 fois les parties solides séparés sur le filtre avec 50 ml  
 50 de benzène à 60 °C, afin de mesurer la quantité d'atomes Al présents dans la totalité du filtrat, et  
 (b) un rapport ( $D_{1260}/D_{1220}$ ) de l'absorbance ( $D_{1260}$ ) à  $1260\text{ cm}^{-1}$  à l'absorbance ( $D_{1220}$ ) à  $1220\text{ cm}^{-1}$ , les deux obtenues par spectrophotométrie infrarouge, inférieur à 0,09/1.
2. Composant de catalyseur conforme à la revendication 1, dans lequel (a) moins de 2 % en termes  
 55 d'atomes d'aluminium du composant contenant de l'aluminium se dissolvent dans du benzène maintenu à 60 °C.

3. Composant de catalyseur conforme à la revendication 1 ou 2, dans lequel (b) le rapport ( $D_{1260}/D_{1220}$ ) est compris entre 0,04 et 0,07.
4. Catalyseur de polymérisation d'oléfines comprenant  
5 [A] un composé oxy-organoaluminique conforme à la revendication 1, 2 ou 3 et  
[B] un composé de métal de transition contenant un ligand ayant une structure de base de type cycloalcaladiényle.
5. Catalyseur conforme à la revendication 4, dans lequel le composé de métal de transition [B] est un  
10 composé de métal de transition contenant au moins deux ligands ayant une structure de base de type cycloalcaladiényle, lesdits ligands étant liés ensemble par des groupes alkylène inférieurs.
6. Catalyseur conforme à la revendication 4 ou 5, comprenant en outre  
15 [C] un composé organoaluminique.
7. Catalyseur conforme à la revendication 6, dans lequel le composé organoaluminique [C] est un  
composé organoaluminique représenté par la formule  $R^6_nAlY_{3-m}$  dans laquelle  $R^6$  est un groupe  
hydrocarboné comportant de 1 à 12 atomes de carbone, X est un halogène et m vaut de 1 à 3, ou par  
la formule  $R^6_nAlY_{3-n}$  dans laquelle  $R^6$  est celui défini ci-dessus, Y est un atome d'hydrogène, un  
20 groupe  $-OR^7$ ,  $-OSiR^8_3$ ,  $-OAlR^9_2$ ,  $-N(R^{11})AlR^{10}_2$ ,  $-NR^{12}_2$  ou  $-SiR^{12}_3$ , n vaut 1 - 2 et  $R^7$  à  $R^{13}$ , identiques  
ou différents, représentent un atome d'hydrogène, d'halogène ou un groupe hydrocarboné.
8. Catalyseur conforme à la revendication 4, 5 ou 6, comprenant en outre  
25 [D] un aluminoxane ayant au moins un groupe hydrocarboné, autre que n-alkyle, lié à l'atome  
d'aluminium.
9. Catalyseur conforme à la revendication 8, dans lequel, dans [D], le groupe hydrocarboné, autre que n-  
alkyle, est un groupe alkyle ramifié, cycloalkyle ou aryle.
- 30 10. Procédé de préparation d'une polyoléfine comprenant la polymérisation ou la copolymérisation d'oléfi-  
nes en présence d'un catalyseur de polymérisation d'oléfines conforme à une quelconque des  
revendications 4 à 9.

35

40

45

50

55

FIG. 1

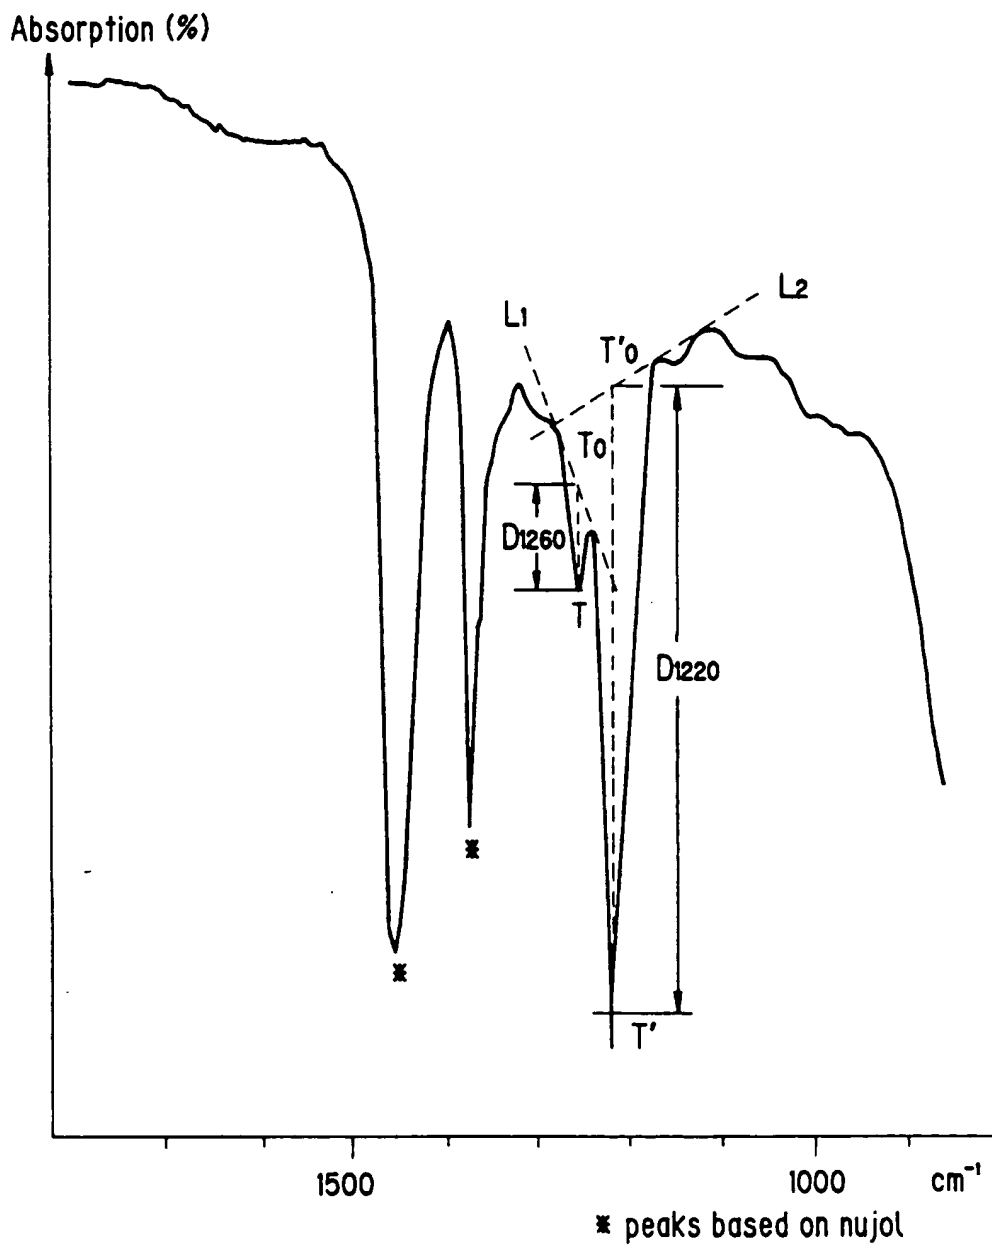


FIG. 2

